



Electrolux

Modular Cooking Range Line 700XP 6-Burner Gas Range on Gas Oven with Cupboard

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



Modular Cooking Range Line

700XP 6-Burner Gas Range on Gas Oven with
Cupboard

371005 (E7GCGL6C10)

6-burner (5,5 kW each) gas
range on gas oven (6 kW)
and cupboard

Short Form Specification

Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Stainless steel oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to have stainless steel feet with height adjustment up to 50 mm.
- The six 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Cupboard compartment for storage of pots, pans, sheet pans etc.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Stainless steel oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed enamelled steel base plate.
- Oven thermostat adjustable from 110 °C to 270 °C.
- Double skinned door with pressed internal panel for heat insulation.
- IPX 4 water protection.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250
- 1 of Door for open base cupboard PNC 206350

Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Draught diverter, 150 mm diameter PNC 206132 ☐

APPROVAL: _____




Electrolux

Modular Cooking Range Line
700XP 6-Burner Gas Range on Gas Oven with Cupboard


- | | | | |
|--|------------|---|------------|
| • Matching ring for flue condenser, 150 mm diameter | PNC 206133 | • Right and left side handrails | PNC 206307 |
| • Kit 4 wheels - 2 swivelling with brake - it is mandatory to install base support and wheels | PNC 206135 | • Door for open base cupboard | PNC 206350 |
| • Flanged feet kit | PNC 206136 | • Wok pan support for open burners (700/900) | PNC 206363 |
| • Frontal kicking strip for concrete installation, 200mm | PNC 206146 | • Base support for feet or wheels - 400mm (700/900) | PNC 206366 |
| • Frontal kicking strip for concrete installation, 400mm | PNC 206147 | • Base support for feet or wheels - 800mm (700/900) | PNC 206367 |
| • Frontal kicking strip for concrete installation, 800mm | PNC 206148 | • Base support for feet or wheels - 1200mm (700/900) | PNC 206368 |
| • Frontal kicking strip for concrete installation, 1000mm | PNC 206150 | • Base support for feet or wheels - 1600mm (700/900) | PNC 206369 |
| • Frontal kicking strip for concrete installation, 1200mm | PNC 206151 | • Base support for feet or wheels - 2000mm (700/900) | PNC 206370 |
| • Frontal kicking strip for concrete installation, 1600mm | PNC 206152 | • Rear paneling - 1200mm (700/900) | PNC 206376 |
| • Frontal kicking strip, 200mm (not for refr-freezer base) | PNC 206174 | • Kit town gas nozzles (G150) for 700 gas range | PNC 206387 |
| • Frontal kicking strip, 400mm (not for refr-freezer base) | PNC 206175 | • 2 side covering panels for free standing appliances | PNC 216000 |
| • Frontal kicking strip, 800mm (not for refr-freezer base) | PNC 206176 | • Frontal handrail, 1200mm | PNC 216049 |
| • Frontal kicking strip, 1000mm (not for refr-freezer base) | PNC 206177 | • Frontal handrail, 1600mm | PNC 216050 |
| • Frontal kicking strip, 1200mm (not for refr-freezer base) | PNC 206178 | • Large handrail - portioning shelf, 400mm | PNC 216185 |
| • Frontal kicking strip, 1600mm (not for refr-freezer base) | PNC 206179 | • Large handrail - portioning shelf, 800mm | PNC 216186 |
| • Kit 4 feet for concrete installation (not for 900 line free standing grill) | PNC 206210 | • Double burner smooth plate for direct cooking | PNC 921684 |
| • 2 supports with side runners for 4 GN 1/1 containers for open base cupboards (multifunctional cookers, solid top and gas ranges with cupboard) | PNC 206244 | • Double burner ribbed plate for direct cooking | PNC 921685 |
| • Flue condenser for 1 module, 150 mm diameter | PNC 206246 | • Pressure regulator for gas units | PNC 927225 |
| • Pair of side kicking strips | PNC 206249 | | |
| • Electric heating kit for cupboards | PNC 206259 | | |
| • Single burner smooth plate for direct cooking - fits frontal burners only | PNC 206260 | | |
| • Single burner ribbed plate for direct cooking- fits frontal burners only | PNC 206261 | | |
| • Single burner radiant plate for pan support | PNC 206264 | | |
| • Pair of side kicking strips for concrete installation | PNC 206265 | | |
| • Water column with swivel arm (water column extension not included) | PNC 206289 | | |
| • Water column extension for 700 line | PNC 206291 | | |
| • Stainless steel double grid for 2 burners | PNC 206297 | | |
| • Chimney upstand, 1200mm | PNC 206306 | | |

Modular Cooking Range Line 700XP 6-Burner Gas Range on Gas Oven with Cupboard

Front

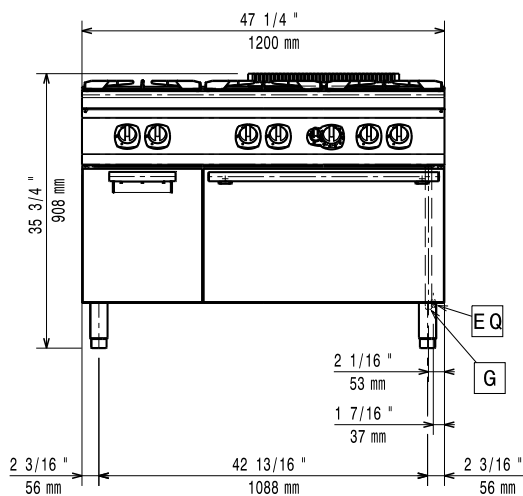


Top

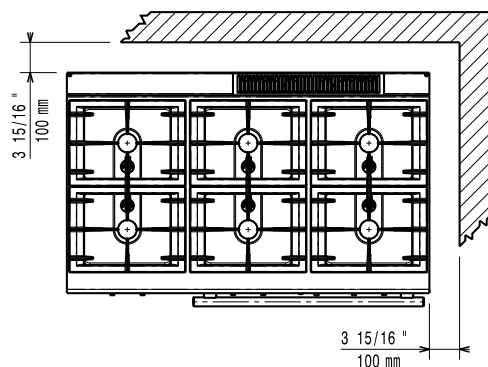

G = Gas connection

Side

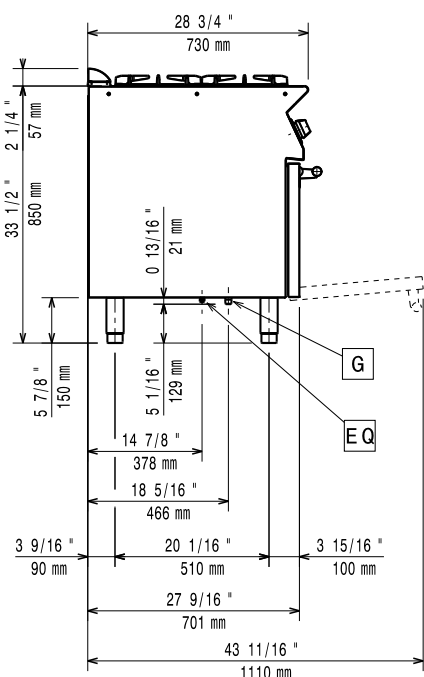

Gas

Gas Power:

371005 (E7GCGL6C10)

132951 Btu/hr (39 kW)

Standard gas delivery:

Natural Gas

Gas Type Option:

LPG;Town

Gas Inlet:

1/2"

Key Information:

Front Burners Power:

5.5 - 5.5 kW

Back Burners Power:

5.5 - 5.5 kW

Middle Burners Power:

5.5 - 0/5.5 - 0 kW

Back Burners Dimension - mm

Ø 60 Ø 60

Front Burners Dimension - mm

Ø 60 Ø 60

Middle Burners Dimension - mm

Ø 60 Ø 60

Oven working Temperature:

110 °C MIN; 270 °C MAX

Oven Cavity Dimensions (width):

540 mm

Oven Cavity Dimensions (height):

300 mm

Oven Cavity Dimensions (depth):

650 mm

Storage Cavity Dimensions (width):

330 mm

Storage Cavity Dimensions (height):

380 mm

Storage Cavity Dimensions (depth):

640 mm

Net weight:

120 kg

Shipping weight:

130 kg

Shipping height:

1090 mm

Shipping width:

820 mm

Shipping depth:

1300 mm

Shipping volume:

1.16 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.