Electrolux

Crosswise Convection Electric Convection Oven, 10 GN2/1 - 60Hz



Crosswise Convection

Electric Convection Oven, 10 GN2/1 - 60Hz

260728 (FCE10260)

Electric convection oven 10x2/1GN, crosswise

Short Form Specification

<u>Item No.</u>

Main structure in stainless steel, with seamless joints in the oven cavity. Double-glazed door with tempered glass. Cavity lighting. Unique airflow channel system.

Cooking cycles: air convection, convection with 5 stage humidification. Max. temperature of 300°C.

Functional level: base, manual.

"Cross-wise" pan rack suitable for 10x2/1GN or 20x1/1GN.The pan rack, fixed, can be converted into a roll-in rack by using an optional kit. Supplied with n. 1 pan rack, 60mm pitch (made up of n. 2 side hangers).

ITEM # MODEL # NAME # SIS # AIA

Main Features

- IPX4 water resistance certification.
- Racks can be easily removed without the need for special tools.
- Unique air-flow system guarantees perfect distribution of heat throughout the oven cavity.
- Maximum temperature of 300°C.
- Food temperature probe available as accessory.
- Rapid cooling of oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- 5 Stage humidification control, to ensure perfect pastries and succulent roasts.
- Meets the requirements of CE, VDE and DVGW for safety.

Construction

- Height adjustable feet.
- Access to all components from the front.
- Stainless steel oven cavity with rounded corners.
- Double-glazed door with tempered glass.
- External access door for electrical connections.
- All connections made on the left side below the oven.
- Integrated drain outlet.

Included Accessories

 1 of 60mm pitch side hangers for 10x2/1GN oven (included with the oven)

Optional Accessories

• Automatic water softener for ovens PNC 921305 Resin sanitizer for water softener PNC 921306 Probe for ovens 10x2/1GN PNC 921703 Guide kit for 1/1GN drain pan PNC 921713 Couple of grids for whole chicken PNC 922036 1/1GN (8 per grid) Base for ovens 10x2/1GN PNC 922103 Shelf guides for 10x2/1GN, oven PNC 922107 base Cupboard stand for oven 10x2/1GN PNC 922110 Hot cupboard stand for convection PNC 922113 oven 10x2/1GN 80mm pitch side hangers for PNC 922117 10x2/1GN oven

lectrolux


APPROVAL:

Electrolux

•	60mm pitch side hangers for 10x2/1GN oven (included with the oven)	PNC	922123 🗅
•	Feet for ovens 6x1/1GN, 10x1/1 and 2/1GN	PNC	922127 🗅
•	Trolley for 10x1/1GN and 10x2/1GN roll-in rack	PNC	922128 🗅
•	Retractable hose reel spray unit	PNC	922170
•	Side external spray unit (needs to be mounted outside and includes support for mounting to oven)	PNC	922171 🗖
•	Pair of baking tray support	PNC	922173 🗅
•	Pair of 2/1GN aisi 304 stainless steel grids	PNC	922175 🗅
•	Fat filter for 10 1/1 and 2/1 GN combi steamers (gas and electric) and convection ovens (electric)	PNC	922178 🗅
•	Kit to convert to 10x2/1GN roll-in rack	PNC	922202
•	2 frying baskets for ovens	PNC	922239
•	Grid for whole chicken 1/1GN (8 per grid - 1,2kg each)	PNC	922266
•	Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens	PNC D	922325
•	Universal skewer rack	PNC	922326
•	6 short skewers	PNC	922328
•	Smoker for lengthwise and crosswise ovens - 4 kinds of smoker wood chips are available on request	PNC	922338

Electrolux



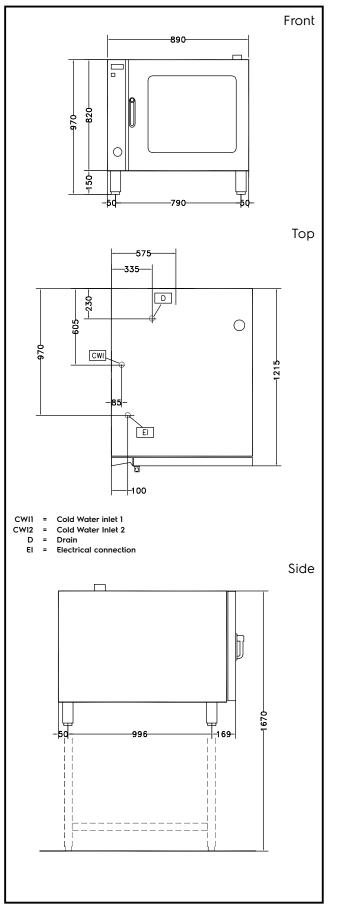

CE

DNV-GL

Electric Supply voltage: 260728 (FCE10260) 400 V/3N ph/60 Hz Auxiliary: 0.5 kW Electrical power max.: 24.5 kW Capacity: Shelf capacity: 10 **Key Information:** External dimensions, Height: 970 mm External dimensions, Width: 890 mm External dimensions, Depth: 1215 mm Net weight: 147 kg 80/0 mm Height adjustment: Functional level: Basic Type of grids: 2/1 Gastronorm **Runners pitch:** 60 mm Cooking cycles - air-convection: 300 °C

Crosswise Convection Electric Convection Oven, 10 GN2/1 - 60Hz

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.