Modular Cooking Range Line 700XP 2-Burner Gas Boiling Top

ITEM #		
MODEL #		
NAME #		
SIS #		
ΔIA #		_



Modular Cooking Range Line 700XP 2-Burner Gas Boiling Top

371000 (E7GCGD2C00)

2-burner (5,5 kW each) gas boiling top

Short Form Specification

Item No.

Unit to be Electrolux 700XP two 5.5 kW gas boiling top range. Unit to be installed on open base installations, bridging supports or cantilever systems. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Exterior panels in Stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick Stainless steel. Unit has right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The two 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- IPX 4 water protection.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.






Modular Cooking Range Line 700XP 2-Burner Gas Boiling Top

Optional Accessories

(Optional Accessories		
•	Junction sealing kit	PNC □	206086
•	Draught diverter, 120 mm diameter	PNC	206126
•	Matching ring for flue condenser, 120 mm diameter	PNC	206127 🗖
•	Support for bridge type installation, 800mm	PNC	206137
•	Support for bridge type installation, 1000mm	PNC	206138
•	Support for bridge type installation, 1200mm	PNC	206139
•	Support for bridge type installation, 1400mm	PNC □	206140
•	Support for bridge type installation, 1600mm	PNC	206141 🗖
•	Support for bridge type installation, 400mm	PNC □	206154
•	Single burner smooth plate for direct cooking - fits frontal burners only	PNC □	206260
•	Single burner ribbed plate for direct cooking- fits frontal burners only	PNC	206261
•	Single burner radiant plate for pan support	PNC □	206264
•	Water column with swivel arm (water column extension not included)	PNC □	206289
•	Water column extension for 700 line	PNC □	206291
•	Stainless steel double grid for 2 burners	PNC □	206297
•	Chimney upstand, 400mm	PNC □	206303
•	Right and left side handrails	PNC □	206307
•	Back handrail 800mm, Marine	PNC □	206308
•	Flue condenser for 1/2 module, 120 mm diameter	PNC □	206310
•	Wok pan support for open burners (700/900)	PNC	206363
•	Kit town gas nozzles (G150) for 700 gas range	PNC	206387
	Frontal handrail, 400mm		216046
•	Frontal handrail, 800mm	PNC	216047
•	Frontal handrail, 1200mm	PNC	216049
•	Frontal handrail, 1600mm	PNC	216050
	Large handrail - portioning shelf, 400mm	PNC	216185 🗖
•	Large handrail - portioning shelf, 800mm		216186 🗖
	2 side covering panels for top appliances	PNC	216277 🗖
	Double burner smooth plate for direct cooking	PNC	921684
•	Double burner ribbed plate for direct cooking		921685
•	Pressure regulator for gas units	PNC	927225



Modular Cooking Range Line 700XP 2-Burner Gas Boiling Top

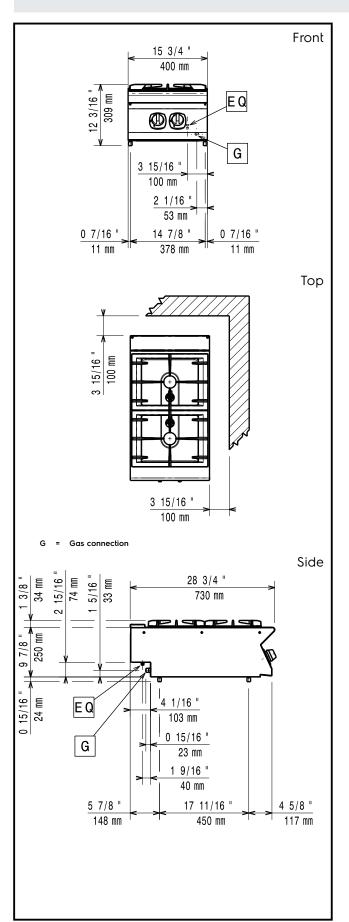

Gas

Gas Power:

371000 (E7GCGD2C00)

Standard gas delivery:
Gas Type Option:
Gas Inlet:

37499 Btu/hr (11 kW)
Natural Gas G20 (20mbar)
LPG;Natural Gas;Town
1/2"

Key Information:

Front Burners Power: 5.5 - kW Back Burners Power: 5.5 - 0 kW

Back Burners Dimension -

mm Ø 60

Front Burners Dimension -

mm Ø 60
Net weight: 22.95 kg
Shipping weight: 27 kg
Shipping height: 540 mm
Shipping width: 460 mm
Shipping depth: 820 mm
Shipping volume: 0.2 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat

insulation fitted.

Modular Cooking Range Line 700XP 2-Burner Gas Boiling Top