



Electrolux

Modular Cooking Range Line 700XP Two Wells Freestanding Gas Fryer 15 liter

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



Modular Cooking Range Line

700XP Two Wells Freestanding Gas Fryer 15 liter

371071 (E7FRGH2GF0)

15+15-lt gas fryer free standing with 2 "V" shape wells (external burners) and 2 baskets

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. Four high efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on 50mm height adjustable feet in stainless steel.
- Deep drawn V-Shaped wells.
- Four high efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPX 4 water protection.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 2 of Door for open base cupboard PNC 206350
- 2 of Full size basket for 14 and 15lt free standing fryers PNC 921691

Optional Accessories

- Draught diverter, 150 mm diameter ☐ PNC 206132
- Matching ring for flue condenser, 150 mm diameter ☐ PNC 206133
- Kit 4 wheels - 2 swivelling with brake support and wheels ☐ PNC 206135
- Flanged feet kit ☐ PNC 206136
- Frontal kicking strip for concrete installation, 200mm ☐ PNC 206146
- Frontal kicking strip for concrete installation, 400mm ☐ PNC 206147
- Frontal kicking strip for concrete installation, 800mm ☐ PNC 206148
- Frontal kicking strip for concrete installation, 1000mm ☐ PNC 206150
- Frontal kicking strip for concrete installation, 1200mm ☐ PNC 206151
- Frontal kicking strip for concrete installation, 1600mm ☐ PNC 206152

APPROVAL: _____




Electrolux

700XP Two Wells Freestanding Gas Fryer 15 liter


Modular Cooking Range Line

- Frontal kicking strip, 200mm (not for refr-freezer base) ☐ PNC 206174 ☐
- Frontal kicking strip, 400mm (not for refr-freezer base) ☐ PNC 206175 ☐
- Frontal kicking strip, 800mm (not for refr-freezer base) ☐ PNC 206176 ☐
- Frontal kicking strip, 1000mm (not for refr-freezer base) ☐ PNC 206177 ☐
- Frontal kicking strip, 1200mm (not for refr-freezer base) ☐ PNC 206178 ☐
- Frontal kicking strip, 1600mm (not for refr-freezer base) ☐ PNC 206179 ☐
- Kit 4 feet for concrete installation (not for 900 line free standing grill) ☐ PNC 206210 ☐
- Sediment tray for 15lt fryers ☐ PNC 206235 ☐
- Flue condenser for 1 module, 150 mm diameter ☐ PNC 206246 ☐
- Pair of side kicking strips ☐ PNC 206249 ☐
- Pair of side kicking strips for concrete installation ☐ PNC 206265 ☐
- Chimney upstand, 800mm ☐ PNC 206304 ☐
- Right and left side handrails ☐ PNC 206307 ☐
- Door for open base cupboard ☐ PNC 206350 ☐
- Base support for feet or wheels - 400mm (700/900) ☐ PNC 206366 ☐
- Base support for feet or wheels - 800mm (700/900) ☐ PNC 206367 ☐
- Base support for feet or wheels - 1200mm (700/900) ☐ PNC 206368 ☐
- Base support for feet or wheels - 1600mm (700/900) ☐ PNC 206369 ☐
- Base support for feet or wheels - 2000mm (700/900) ☐ PNC 206370 ☐
- Rear paneling - 800mm (700/900) ☐ PNC 206374 ☐
- Rear paneling - 1000mm (700/900) ☐ PNC 206375 ☐
- Rear paneling - 1200mm (700/900) ☐ PNC 206376 ☐
- Chimney grid net, 400mm (700XP/900) ☐ PNC 206400 ☐
- 2 side covering panels for free standing appliances ☐ PNC 216000 ☐
- Frontal handrail, 800mm ☐ PNC 216047 ☐
- Frontal handrail, 1200mm ☐ PNC 216049 ☐
- Frontal handrail, 1600mm ☐ PNC 216050 ☐
- Large handrail - portioning shelf, 400mm ☐ PNC 216185 ☐
- Large handrail - portioning shelf, 800mm ☐ PNC 216186 ☐
- Full size basket for 14 and 15lt free standing fryers ☐ PNC 921691 ☐
- 2 half size baskets for 12, 14 and 15lt fryers ☐ PNC 921692 ☐
- Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers ☐ PNC 921693 ☐
- Unclogging rod for 15lt fryers drainage pipe ☐ PNC 921695 ☐
- Deflector for floured products for 15lt fryers ☐ PNC 921696 ☐
- Pressure regulator for gas units ☐ PNC 927225 ☐

Front

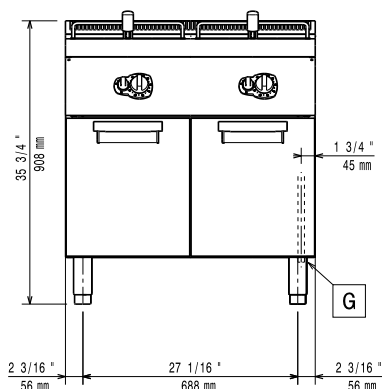


Top

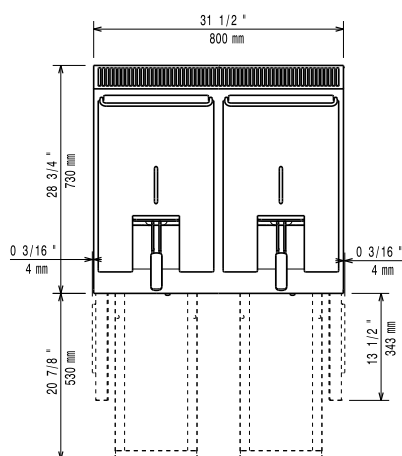

EQ = Equipotential screw
G = Gas connection

Side

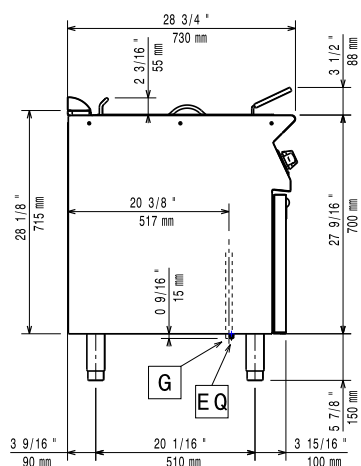

Gas

Gas Power:	371071 (E7FRGH2GF0)	95452 Btu/hr (28 kW)
Standard gas delivery:		Natural Gas
Gas Type Option:		LPG; Natural Gas
Working pressure, mBar (min/Max):		0 / 0
Gas Inlet:		1/2"

Key Information:

Usable well dimensions (width):	240 mm
Usable well dimensions (height):	505 mm
Usable well dimensions (depth):	380 mm
Well capacity:	13 lt MIN; 15 lt MAX
Thermostat Range:	105 °C MIN; 185 °C MAX
Net weight:	85 kg
Shipping weight:	90 kg
Shipping height:	1140 mm
Shipping width:	820 mm
Shipping depth:	850 mm
Shipping volume:	0.79 m ³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.