



Electrolux

Modular Cooking Range Line 700XP Freestanding Gas Pasta Cooker, 1 Well 24.5 litres

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Modular Cooking Range Line

700XP Freestanding Gas Pasta Cooker, 1 Well
24.5 litres

371090 (E7PCGD1KF0)

24,5-lt gas pasta cooker
with 1 well

Short Form Specification

Item No. _____

High efficiency 10.5 kW burners. Suitable for natural gas or LPG. Constant starch removal during the cooking process. The tank is pressed in AISI 316 stainless steel to protect against corrosion. Control panel with gas cock, piezo ignition. Manual water tap. Height adjustable feet in stainless steel. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- High efficiency 10.5 kW burners in stainless steel with flame failure device and optimized combustion, located below the well.
- No electrical connection needed.
- Water basin in 316 type Stainless steel.
- Water basin is seamlessly welded into the top of the appliance.
- Provided with integrated drip zone on which baskets can be placed for draining purposes.
- 24.5 liters water basin.
- Unit to feature skimming zone for starch removal: improved water quality over time.
- Easy-to-use control panel with gas cock and piezo ignition.
- Safety thermostat to avoid operation without water.
- Continuous water filling regulated through a manual water tap.
- Large drain with manual ball-valve for fast emptying of well.
- ESD available as accessory (installed separately): energy saving device uses heat produced by water drained through the overflow to pre-heat tap-in water up to 60°C, for constant water boiling.
- EnergyControl: unique feature for fine power adjustment to control boiling level and optimize energy consumption.
- Automatic lifting system (optional accessory): 200mm wide unit with two stainless steel basket supports, holding one GN 1/2 basket each, to be placed on either or both sides of machine to provide automatic lifting for four small portion baskets (to be ordered separately). Possibility to memorize nine cooking times through digital control.
- All major compartments located in front of unit for ease of maintenance.
- IPX4 water resistance certification.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of Door for open base cupboard PNC 206350

Optional Accessories

APPROVAL: _____




Electrolux


Modular Cooking Range Line
700XP Freestanding Gas Pasta Cooker, 1 Well 24.5 litres

• Draught diverter, 120 mm diameter	PNC 206126 □	• Rear paneling - 600mm (700/900XP)	PNC 206373 □
• Matching ring for flue condenser, 120 mm diameter	PNC 206127 □	• Rear paneling - 800mm (700/900)	PNC 206374 □
• Kit 4 wheels - 2 swivelling with brake - it is mandatory to install base support and wheels	PNC 206135 □	• Rear paneling - 1000mm (700/900)	PNC 206375 □
• Flanged feet kit	PNC 206136 □	• Rear paneling - 1200mm (700/900)	PNC 206376 □
• Frontal kicking strip for concrete installation, 200mm	PNC 206146 □	• Chimney grid net, 400mm (700XP/900)	PNC 206400 □
• Frontal kicking strip for concrete installation, 400mm	PNC 206147 □	• 2 side covering panels for free standing appliances	PNC 216000 □
• Frontal kicking strip for concrete installation, 800mm	PNC 206148 □	• Frontal handrail, 400mm	PNC 216046 □
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150 □	• Frontal handrail, 800mm	PNC 216047 □
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151 □	• Frontal handrail, 1200mm	PNC 216049 □
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152 □	• Frontal handrail, 1600mm	PNC 216050 □
• Frontal kicking strip, 200mm (not for refr-freezer base)	PNC 206174 □	• Large handrail - portioning shelf, 400mm	PNC 216185 □
• Frontal kicking strip, 400mm (not for refr-freezer base)	PNC 206175 □	• Large handrail - portioning shelf, 800mm	PNC 216186 □
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176 □	• Support rack for 4-single portion baskets for automatic lifting pasta cookers	PNC 921606 □
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177 □	• Lid for pasta cookers	PNC 921607 □
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178 □	• 2 baskets 170x220 for pasta cookers	PNC 921610 □
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179 □	• Full size basket for 24,5lt pasta cookers	PNC 921611 □
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210 □	• 2 half size baskets 105x350 for pasta cookers for 24,5lt pasta cookers	PNC 921619 □
• Pair of side kicking strips	PNC 206249 □	• Pressure regulator for gas units	PNC 927225 □
• Pair of side kicking strips for concrete installation	PNC 206265 □		
• Water column with swivel arm (water column extension not included)	PNC 206289 □		
• Water column extension for 700 line	PNC 206291 □		
• Chimney upstand, 400mm	PNC 206303 □		
• Right and left side handrails	PNC 206307 □		
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310 □		
• Energy saving device for pasta cookers	PNC 206344 □		
• Door for open base cupboard	PNC 206350 □		
• Automatic programmable basket lifting system for 24,5lt pasta cookers, 2 lifters	PNC 206352 □		
• Base support for feet or wheels - 400mm (700/900)	PNC 206366 □		
• Base support for feet or wheels - 800mm (700/900)	PNC 206367 □		
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368 □		
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369 □		
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370 □		

Front

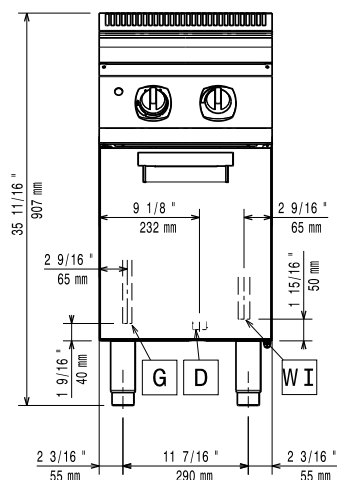


Top

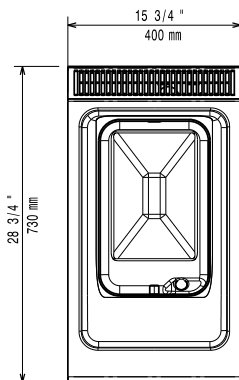

D = Drain
EQ = Equipotential screw
G = Gas connection

Side

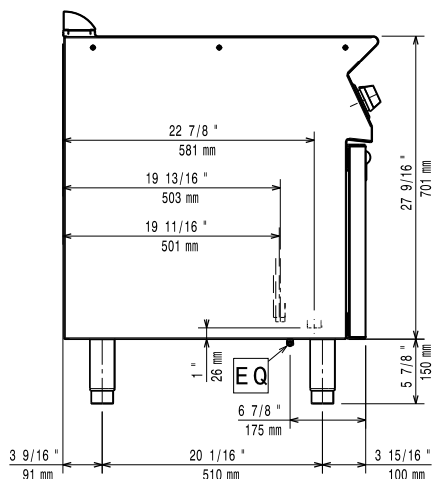

Gas

Gas Power:	371090 (E7PCGD1KF0)	35794.5 Btu/hr (11.5 kW)
Standard gas delivery:		Natural Gas
Gas Type Option:		LPG
Gas Inlet:		1/2"

Water:

Drain "D":	1"
Incoming Cold/hot Water line size:	1/2"
Total hardness:	5-50 ppm
Electrolux recommends the use of treated water, based on testing of specific water conditions.	
Please refer to user manual for detailed water quality information.	

Key Information:

Usable well dimensions (width):	250 mm
Usable well dimensions (height):	300 mm
Usable well dimensions (depth):	400 mm
Well Capacity (MAX):	24.5 lt MAX
Net weight:	50 kg
Shipping weight:	46 kg
Shipping height:	1140 mm
Shipping width:	460 mm
Shipping depth:	820 mm
Shipping volume:	0.43 m ³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.