



**a Standex company**

ITEM: \_\_\_\_\_ PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

## REFRIGERATED SELF-SERVE HIGH PROFILE SPECIALTY MERCHANDISER

**MODEL** ☐ **RSSM-360SC** ☐ **RSSM-378SC**  
☐ **RSSM-460SC** ☐ **RSSM-478SC**  
☐ **RSSM-560SC** ☐ **RSSM-578SC**  
☐ **RSSM-660SC** ☐ **RSSM-678SC**



*Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits. Available in lengths of 3', 4', and 6', and 60" or 78" high.*


### STANDARD FEATURES

- Adjustable black metal shelves with price tag molding. Shelves can be flat or slanted. The 60" case has two tiers of shelves, the 78" case has four tiers.
- Top mounted octron shielded light. Shelf lights optional.
- Choice of six standard laminates on exterior. Other color laminates are optional. Black metal front grill and galvanized steel back.
- Silver trim, gold, and black optional.
- Stainless steel display deck, glass and black interior ends, black interior back panel.
- Energy saving night curtain.
- Solid state timer provides automatic defrost.
- Condensate evaporator provided for a totally self-contained system. (Not available on RSSM-560SC and RSSM-660SC. Condensate pump provided.)
- Insulated with high-density urethane foam.
- Continuous line-ups are available for remote applications.
- Refrigeration controls maintain 40°F. Note: Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall.
- Thermometer.
- UL Safety and UL Sanitation Listed.

# REFRIGERATED SELF-SERVE HIGH PROFILE SPECIALTY MERCHANDISER

## OPTIONAL ACCESSORIES:

- |  |  |   |
|--|--|---|
| <input type="checkbox"/> Special Laminate Finish                         | <input type="checkbox"/> Light Below Shelves                                     | <input type="checkbox"/> Condensate Pump                                |
| <input type="checkbox"/> Roll-up Security Cover or Removable Night Cover | <input type="checkbox"/> Black or Gold Trim                                      | <input type="checkbox"/> Condensate Evaporator Assembly (Field Install) |
| <input type="checkbox"/> Wire Shelves in Lieu of Flat Metal              | <input type="checkbox"/> Wire Baskets in Lieu of Flat Metal                      |   |
| <input type="checkbox"/> Joining Kit for Continuous Line-ups             | <input type="checkbox"/> Deli Meat Hooks or Pegs                                 |   |
| <input type="checkbox"/> Remote Refrigeration with Condensate Pump       | <input type="checkbox"/> Casters (Self-Contained Models Only) Cord Included      |   |
| <input type="checkbox"/> Front Condensing Unit Air Discharger            | <input type="checkbox"/> Cord & Plug (Self-Contained Models Only) (NEMA L14-20P) |   |
| <input type="checkbox"/> Sliding and Hinged Rear Access Doors            | <input type="checkbox"/> Reflective End Glass                                    |   |
| <input type="checkbox"/> Rear Side Panel Extensions (Six Inches)         | <input type="checkbox"/> Legs  |   |
| <input type="checkbox"/> Slim 30" Deep Profile                           |  |   |
| <input type="checkbox"/> White Interior (Including Shelving)             |  |   |

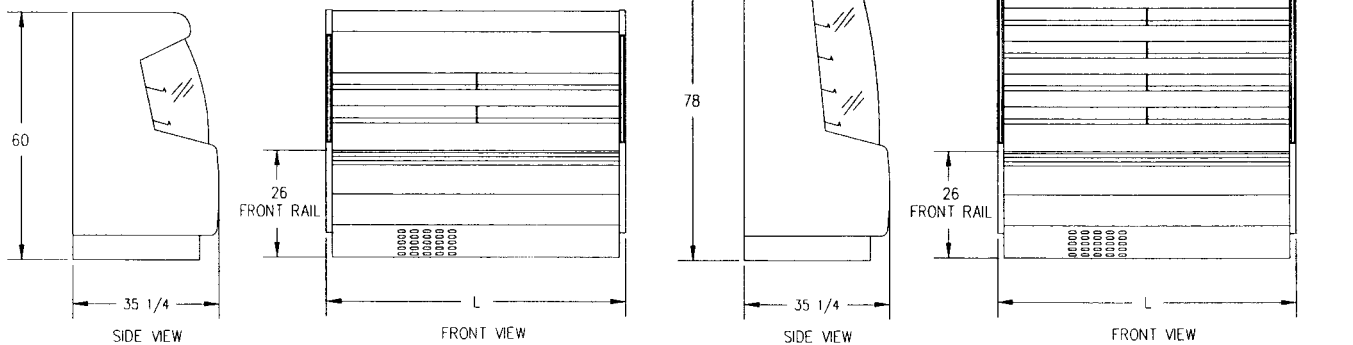

## SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Shelving	Self-Contained 3-Wire Plus Ground 208-240/60/1	Remote 120/60/1
<input type="checkbox"/> RSSM-360SC	36" x 35 1/4" x 60"	709	2 (15" x 34")	1/2 HP • 10 AMPS	3 AMPS
<input type="checkbox"/> RSSM-460SC	47 1/4" x 35 1/4" x 60"	800	2 (15" x 45")	3/4 HP • 13 AMPS	4 AMPS
<input type="checkbox"/> RSSM-560SC	59 1/4" x 35 1/4" x 60"	960	2 (15" x 57")	1 HP • 10 AMPS	5 AMPS
<input type="checkbox"/> RSSM-660SC	71 1/4" x 35 1/4" x 60"	1,020	4 (15" x 34")	1 HP • 10 AMPS	6 AMPS
<input type="checkbox"/> RSSM-378SC	36" x 35 1/4" x 78"	835	4 (15" x 34")	1/2 HP • 10 AMPS	3 AMPS
<input type="checkbox"/> RSSM-478SC	47 1/4" x 35 1/4" x 78"	925	4 (15" x 45")	3/4 HP • 13 AMPS	4 AMPS
<input type="checkbox"/> RSSM-578SC	59 1/4" x 35 1/4" x 78"	1,160	4 (15" x 57")	1 HP • 15 AMPS	5 AMPS
<input type="checkbox"/> RSSM-678SC	71 1/4" x 35 1/4" x 78"	1,220	8 (15" x 34")	1 HP • 15 AMPS	6 AMPS

- Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall.
- Electrical Requirement – The minimum circuit ampacity and maximum fuse size is 20 amps.  
A 120/208-240 volt, 60 hertz, 1 phase, 3-wire plus ground power supply.
- Refrigerated cases are designed to operate in a maximum of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



*The Signature of Quality*

**FEDERAL INDUSTRIES**  
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

