



Electrolux

EMPower Four (4) Drawer Refrigerated- Freezer Base - 84"

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



EMPower

Four (4) Drawer Refrigerated-Freezer Base - 84"

727091 (COMP84)

EMPower Restaurant Range Dual Temp refrigerated/freezer Base, 84" wide, (4) drawers accommodates (1) 18"x26" pan or (2) 12"x20" pans per drawer, (2) digital thermostats, perforated top surface, self-contained, stainless steel construction, 6" adjustable,

Short Form Specification

Item No. _____

EMPower unit to be Electrolux Dual Temp Four (4) Drawer Ref/Freezer Base with built-in compressor EMPower unit able to manage two separate tEMPowerperatures. EMPower unit able to operate both as refrigerator or as freezer, with tEMPowerperature range from -7.6°F to +46.4°F(-22°C to +8°C). 2 digital thermostats and displays are protected by the StainlessSteel front panel. Stainless Steel front panel with incorporated Stainless Steel wire netting is easy to rEMPowerove for access to the thermostat and to allow for easy cleaning. May be installed below any top EMPower unit. Perforated top surface provides the necessary ventilation to allow for a flush connection between base and Electrolux top EMPower units, eliminating the need for the top EMPower unit legs. Each drawer to accommodate two (2) 12"x20"x6" deep pans with use of included, removable division bar or two (2) 325mmx530mm (1/1GN) pans. Drawer guides with safety stop can support up to 264lbs (120kg) and are removable for cleaning. Magnetic snap-in drawer gaskets are removable for cleaning. Perforated bottom plate in each drawer guarantees correct air-flow, allows for small pans to stand upright and is removable for cleaning. Perforated

bottom plates can support up to 88lbs (40kg). Forced air circulation for rapid cooling and an even tEMPowerperature distribution. Access to all components from the front and bottom. CFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane). Suitable for use in ambient tEMPowerperatures of up to 104 °F (40°C). Rounded corners inside well for safe and easy cleaning. Constructed entirely in AISI 304 Stainless Steel with Scotch Brite finish. Right-angled side edges to allow flush fitting joints between EMPower units, minimizing gaps and possible dirt traps. Heavy duty Stainless Steel tubular drawer handles. Supplied with 6" (150mm) height adjustable, removable legs. EMPower unit may be installed on castors.



APPROVAL: _____

Electrolux Professional, Inc.

www.electroluxusa.com/professional

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401



Electrolux

EMPower
Four (4) Drawer Refrigerated-Freezer Base - 84"



Main Features

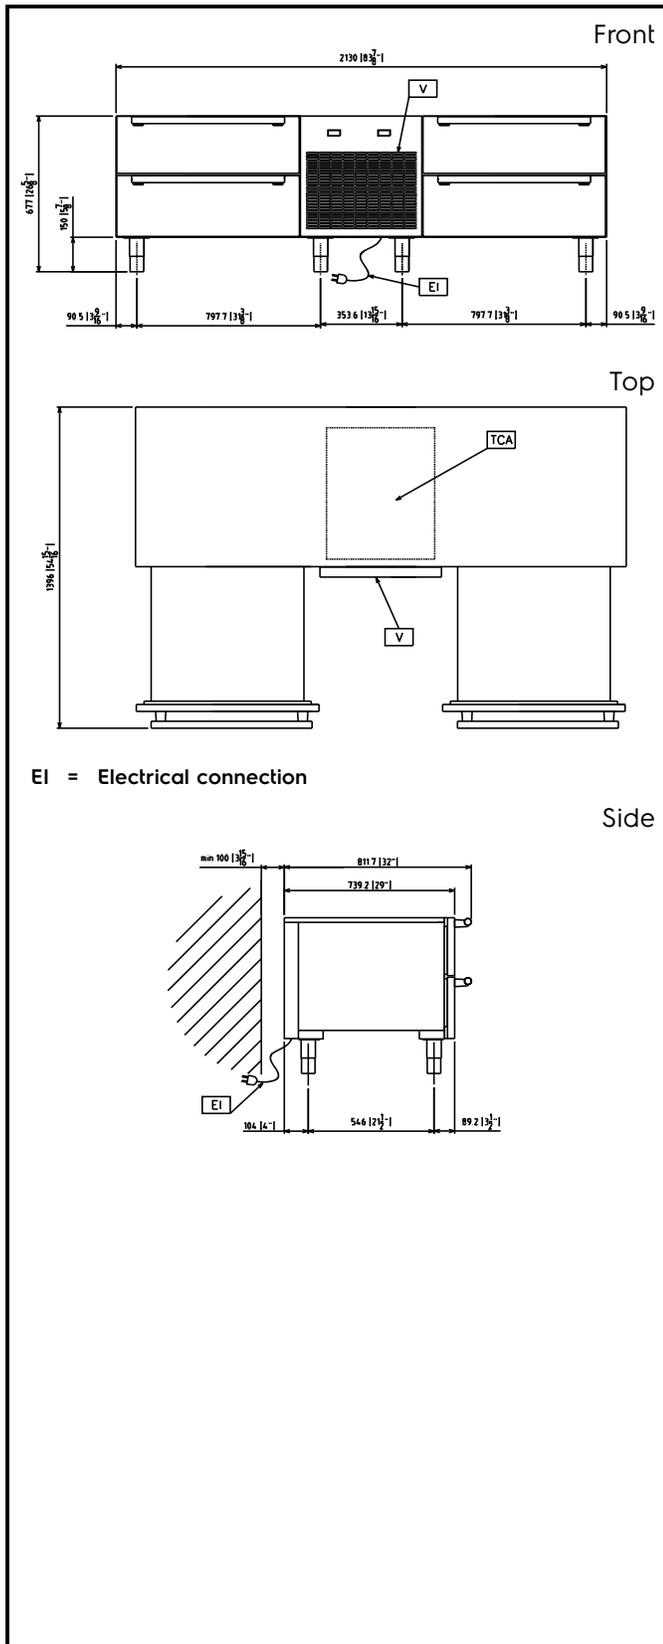
- Four Drawer Refrigerated/Freezer Base with built-in compressor unit able to manage two separate temperatures.
- Unit able to operate both as refrigerator or as freezer, with temperature range from -7.6 °F to +46.4 °F (-22°C to +8°C).
- Two (2) digital thermostats and displays are protected by the Stainless Steel front panel.
- Stainless Steel front panel with incorporated Stainless Steel wire netting is easy to remove for access to the thermostat and to allow for easy cleaning.
- May be installed below any top unit.
- Perforated top surface provides the necessary ventilation to allow for a flush connection between base and Electrolux top units, eliminating the need for the top unit legs.
- Each drawer to accommodate two 12" x 20" x 6" deep pans with use of included, removable division bar or two 325 mm x 530 mm (1/1 GN) pans.
- Drawer guides with safety stop mechanism can support up to 264 lbs. (120 kg) and are removable for cleaning.
- Magnetic snap-in drawer gaskets are removable for cleaning.
- Perforated bottom plate in each drawer guarantees correct air-flow, allows for small pans to stand upright and is removable for cleaning.
- Perforated bottom plate can support up to 88lbs. (40 kg).
- Forced air circulation for rapid cooling and an even temperature distribution.
- Access to all components from the front and bottom.
- Suitable for use in ambient temperatures of up to 104 °F (40 °C).
- Rounded corners inside well for safe and easy cleaning.
- Right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Heavy duty Stainless Steel tubular drawer handles.
- Supplied with 6" (150 mm) height adjustable, removable legs.
- Unit may be installed on casters.
- Digital thermostat and display are protected by the Stainless Steel front panel.

Construction

- CFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).
- Constructed entirely in AISI 304 Stainless Steel with Scotch Brite finish.
- 4 pins to install the top are supplied with the unit.

Optional Accessories

- EMPower kit of 6 wheels (3 with brake) for PNC 880125
refrigerated/freezer base 72" and 84"
- EMPower support for containers in PNC 880249
refrigerated bases
- EMPower 84" stainless steel top (with rear PNC 880317
splash & sides) for refrigerated/freezer
base


Electric

Supply voltage:	120 V/1N ph/60 Hz
727091 (COMP84)	
Amps:	14.5 A
Total Watts:	1.95 kW
Plug type:	NEMA 5-30

Key Information:

External dimensions, Width:	83 7/8" (2131 mm)
External dimensions, Depth:	32 1/64" (813 mm)
External dimensions, Height:	26 3/4" (680 mm)
Net weight:	445 lbs (202 kg)
Shipping width:	33 7/16" (850 mm)
Shipping depth:	88 9/16" (2250 mm)
Shipping height:	30 11/16" (780 mm)
Shipping weight:	467 lbs (212 kg)
Shipping volume:	52.67 ft ³ (1.49 m ³)

Refrigeration Data

Compressor power:	3/4 hp
Refrigerant type:	R404a
Refrigeration power:	1958 W