


Crosswise Convection Electric Convection Oven, 6 GN1/1 - 60Hz

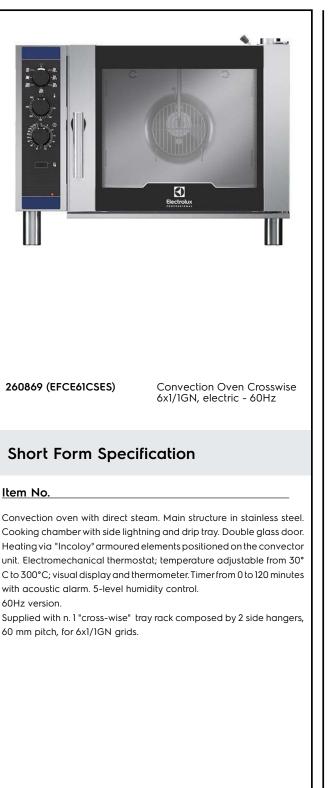

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- Main switch/Cooking mode selector which can be used to set: ON/OFF, hot air without humidification and hot air with humidification (choice of 5 different humidity levels).
- Rapid cooling of oven cavity.
- Timer to set the cooking time, adjustable up to 120 minutes or for continuous operation with an acoustic alarm to show the cycle has finished. At the end of the set cooking time the heat and the fan are automatically switched off.
- Maximum temperature of 300°C.
- Perfect evenness: guarantees perfect distribution of heat throughout the oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- Food temperature probe (available as accessory).
- Drip tray to collect residual cooking juices and fat.
- Drip tray under the door to collect condensed liquid available as accessory.
- Manual valve to adjust the position of steam evacuation flap.
- Capacity: 6 GN 1/1 trays.

Construction

- Robust structure thanks to stainless steel construction.
- Cooking chamber in 430 AISI stainless steel.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Ergonomic door handle.
- Integrated drain outlet.
- 1 pair of 60 mm pitch runners is supplied as standard.
- IPx4 water protection.

APPROVAL:



Optional Accessories

Optional Accessories		
• Stacking kit for 6 GN 1/1 convection oven on 15&25 kg blast chiller/ freezer crosswise	PNC 881528	
 Pair of 1/1GN AISI 304 stainless steel grids 	PNC 921101	
 Support for 1/2GN pan (2pcs) 	PNC 921106	
• Water softener with salt for ovens with automatic regeneration of resin	PNC 921305	
 Probe for ovens 6 and 10x1/1GN 	PNC 921702	
 Guide kit for 1/1GN drain pan 	PNC 921713	
• Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1	PNC 922036	
Open base for 6 GN 1/1 convection oven	PNC 922101	
• Shelf guides for 6x1/1GN, ovens base	PNC 922105	
 Feet for ovens 6x1/1GN, 10x1/1 and 2/1GN 	PNC 922127	
 Retractable hose reel spray unit 	PNC 922170	
• External side spray unit (needs to be mounted outside and includes support to be mounted on the oven)	PNC 922171	
 Pair of frying baskets 	PNC 922239	
 Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 	PNC 922266	
• Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens	PNC 922325	
 Universal skewer rack 	PNC 922326	
Volcano Smoker for lengthwise and	PNC 922338	


• Volcano Smoker for lengthwise and PNC 922338 crosswise oven



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

Crosswise Convection - Electric Convection Oven, 6 GN1/1 60Hz

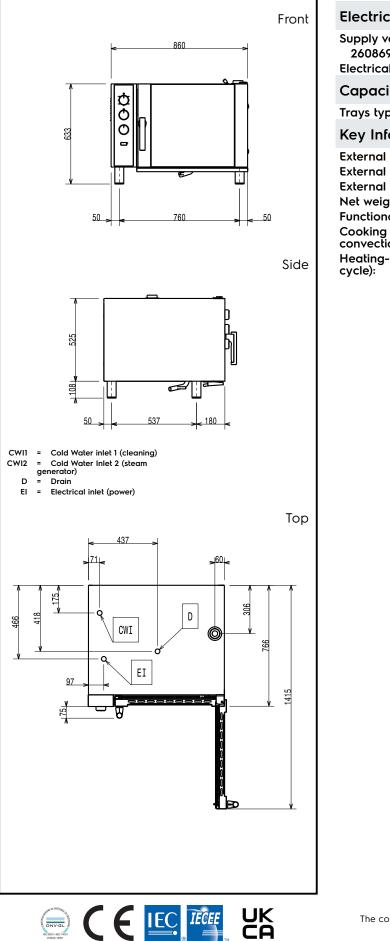

Electric	
Supply voltage: 260869 (EFCE61CSES) Electrical power max.:	380-400 V/3N ph/60 Hz 7.7 kW
Capacity:	
Trays type:	6 - 1/1 Gastronorm
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Net weight: Functional level: Cooking cycles - air- convection: Heating-up time (hot air cycle):	860 mm 746 mm 633 mm 79.5 kg Basic 300 °C 215°C / 300s.

Crosswise Convection Electric Convection Oven, 6 GN1/1 - 60Hz

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.