



Electrolux

Standard Preparation 2000 mm Ventilated Hot Cupboard with Shelf & Sliding Doors

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

Standard Preparation
2000 mm Ventilated Hot Cupboard with Shelf & Sliding Doors



Standard Preparation

2000 mm Ventilated Hot Cupboard with Shelf & Sliding Doors

132678 (MTC2000P)

Hot cupboard with 1 shelf and 2 sliding doors, ventilated, 2000mm

Short Form Specification

Item No. _____

Made entirely from stainless steel. Inner welded frame in stainless steel. Unique connection of panels to inner frame. The 50mm high worktop in 304 AISI stainless steel, 1mm in thickness, incorporates a layer of sound deadening material and has upturned edges. Sound-deadened sliding doors. Base panel in 304 AISI stainless steel and height-adjustable intermediate shelf. Mounted on feet, adjustable in height. Ventilated hot air flow system guarantees temperature evenness, air flows underneath the intermediate shelf and throughout the cabinet. Thermostat with digital display to adjust the internal temperature (up to 75°C).

Main Features

- Model complies with international hygiene and cleanability standards.
- Ideal for central positioning in the kitchen, either as island installation or back to back.
- Digital display thermostat to adjust internal temperature up to 75°C.


Construction

- Inner welded frame in stainless steel to guarantee superior strength and stability.
- Easy access to the cupboard interior on all lengths guaranteed by the use of only 2 doors.
- 50 mm worktop in 304 AISI stainless steel with upturned edges, incorporates an 18 mm layer of sound deadening material.
- Reinforced side and base panel in 304 AISI stainless steel.
- Equipped with intermediate shelf which can be positioned at three different heights.
- Sturdy sound-deadened sliding doors on tracks located flush to the front of the frame.
- All edges are upturned for better safety.
- 304 AISI stainless steel feet, 200 mm high and 54 mm in diameter, adjustable by -50/+30 mm.
- Heavy duty Stainless steel construction.

Optional Accessories

- Set of 4 wheels (2 with brake) d. PNC 125mm for cupboards 855880

APPROVAL: _____

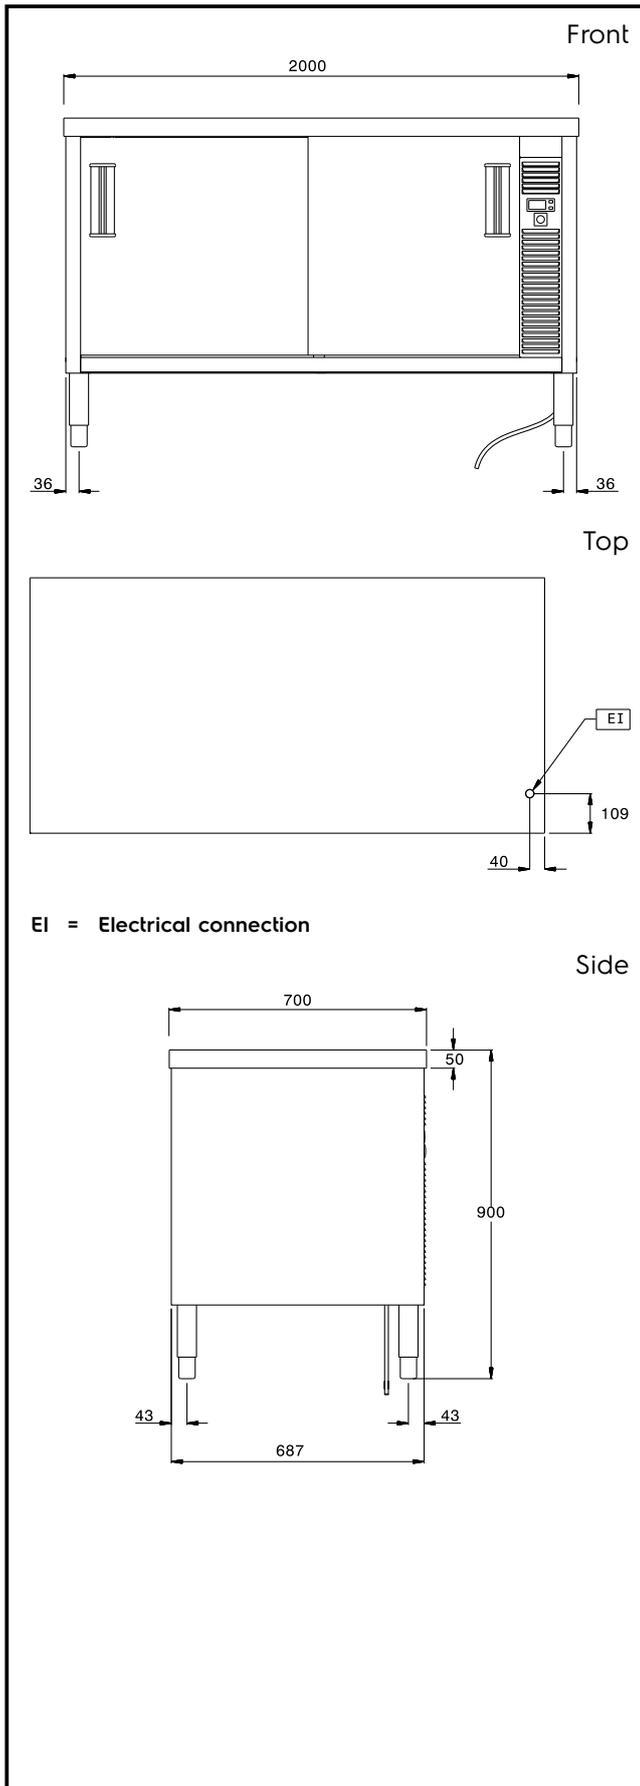

Electric

Supply voltage:

132678 (MTC2000P)

220/240 V/1N ph/50/60 Hz

Total Watts:

2.4 kW

Key Information:

Cabinet width: 1795 mm

Cabinet depth: 620 mm

Cabinet height: 570 mm

Cabinet temperature: 50-75 °C

External dimensions, Height: 900 mm

External dimensions, Width: 2000 mm

External dimensions, Depth: 700 mm

Number and type of doors: 2 Sliding

Worktop thickness: 50 mm

Net weight: 75 kg