



**Electrolux**  
PROFESSIONAL

## SkyLine Chills Blast Chiller-Freezer 102 (220 lbs)

ITEM #

MODEL #

NAME #

SIS #

AIA #



727742 (EBFA12Q)

SKYLINE Chills 220 LBS 10  
FULL SHEET PANS (18" X  
26") REACH-IN

### Short Form Specification

#### Item No.

- Blast chiller freezer with high resolution full touch screen interface, Multilanguage, IP54, ERGOcert, ETL
- OptiFlow air distribution system with 7 fan speed levels
- 3 modes: Automatic (10 food families with 100+ different pre-installed variants); Programs (1000 programs can be stored and organized in 16 different categories); Manual (soft chilling, hard chilling, freezing, holding, turbo cooling and lite hot cycles);
- Special Cycles (Cruise A.R.T.E chilling, proving, retarded proving, fast thawing, Sushi&Sashimi, Sous-Vide chilling, ice-cream, yogurt and chocolate)
- Special functions: MultiTimer, Make-it-Mine, SkyHub homepage, agenda MyPlanner, SkyDuo connection to SkyLine ovens
- Automatic and manual defrosting and drying
- USB port to download HACCP data, programs and settings. Connectivity cloud ready
- 3-point multi sensor core temperature probe
- Built-in refrigeration unit
- R448a refrigerant gas

### Main Features

- Touchscreen: High resolution interface (translated into more than 30 languages including Spanish and French) - color-blind friendly panel.
- Blast Chilling cycle: 220 lbs (100 kg) from +195°F (+90°C) up to +37°F (+3°C) in less than 90 minutes.
- Blast Freezing cycle: 155 lb (70 kg) from 195°F (90°C) up to 0°F (-18°C) in less than four hours.
- Chilling cycle (+50°F to -42°F/+10°C to -41°C) with automatic preset cycles: - Soft chilling (air temperature 32°F/0°C), ideal for delicate food and small portions. - Hard chilling (air temperature -4°F/-20°C), ideal for solid food and whole pieces.
- X-Freeze: cycle (+50°F to -42°F/+10°C to -41°C): ideal for blast freezing all kinds of food (raw, half or fully cooked).
- Lite-Hot cycle (+104°F to 0°F/+40°C to -18°C): Ideal for soft heating preparations.
- Infinite Cycle: chiller works continuously at the desired temperature; ideal for continuous production.
- Automatic chilling/freezing mode including 10 food families (meat, poultry, fish, sauces and soup, vegetables, pasta/rice, bread, pastries and sweet bakery, dessert, beverage fast cooling) with 100+ different pre-installed variations. The Automatic Sensory Phase of the blast chiller optimizes the chilling process according to size, quantity and type of food loaded to achieve the selected result. Real time monitoring of chilling parameters. Personalize and save up to 70 variations per family.
- Cycles+: - Cruise Cycle (Patented EP1716769B1 and related family) automatically sets the parameters for the quickest and best chilling (it works with probe) - Proving - Retarded Proving - Fast Thawing - Sushi&Sashimi (anisakis-free food) - Chill Sous-vide - Ice Cream - Yogurt - Chocolate
- Programs mode: up to 1000 programs can be stored in the blast chiller's memory, to recreate the exact same high standard at any time. The programs can be grouped in 16 different categories to better organize the menu. 16-step chilling programs also available.
- MultiTimer: Special feature to manage up to 20 different cooking cycles at the same time in the same cavity guaranteeing even cooking results. Up to 200 MultiTimer available programs
- OptiFlow: air flow management system to achieve maximum performance in cooking evenness and temperature control thanks to the special design of the cooking chamber, the high precision variable speed fan and the venting valve.
- Cooling Fan: 7 speed levels. Fan stops in less than 5 seconds when door is opened.
- 3-point multi sensor core temperature probe for high precision and food safety.
- 6-point multi sensor core temperature probe for maximum precision and food safety (optional accessory).
- Picture Management: upload full customized images of cooking cycles or food items
- A.R.T.E: Remaining time estimation for probe-driven cycles based on artificial intelligence techniques (ARTE)

APPROVAL:

Electrolux Professional, Inc.

[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

4003 Collins Lane Louisville, KY 40245 USA - fax number: 706-447-6228

**Electrolux**  
PROFESSIONAL

**SkyLine Chills**  
Blast Chiller-Freezer 102 (220 lbs)

2.0 Patented US7971450B2 and related family) for an easier planning of the activities.

- Customization: Modify pre-cooling and pre-heating functions.
- Automatic and manual defrosting and drying.
- Make-it-mine: feature to allow full personalization or locking of the user interface by selecting what is visible on screen
- SkyHub: customizable homepage to allow the user to group their favorite functions for immediate access when operating.
- MyPlanner: on-screen agenda where the user can plan their daily work, set reminders for several users and receive personalized alerts for each activity
- USB port to download HACCP data, share chilling programs and configurations.
- Connectivity: ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- e-learning: equipment trainings, how-to guides, and technical documentation easily accessible by scanning QR-Code with any mobile device.
- Data Analytics: automatic consumption visualization at the end of the cycle.
- Multi-purpose internal structure is suitable for 10 grids GN 2/1 (29 positions available with 30 mm pitch) 10 grids or trays 600 x 400 mm (29 positions available with 30 mm pitch) or 36 ice-cream basins of 5 kg each (h 125 x 165 x 360).
- Performance guaranteed at ambient temperatures of +109° F (+43°C) (Climatic class 5 certified).
- [NOT TRANSLATED]

### Construction

- Built-in refrigeration unit.
- Solenoid valve to automatically manage the gas pressure in the thermodynamic circuit.
- Main components in 304 AISI stainless steel.
- Evaporator with antirust protection.
- Motors and fan waterproof protected IP54.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- Removable magnetic gasket door with hygienic design.
- Ventilator swinging hinged panel for access to the evaporator for cleaning.
- Door stopper to keep the door open in order to avoid the formation of bad smells.
- Automatic heated door frame.
- No water connections required. Waste water can be plumbed into drain, but can also be collected in an optional waste container.

### Sustainability



- Holding at +37°F (+3°C) for chilling or -8 °F (-22°C) for freezing, automatically activated at the end of each cycle, to save energy and maintain the target temperature (manual activation is also possible).
- SkyDuo: Oven and Blast Chiller automatic communication to guide the user through the cook&chill process by creating a safe controlled environment to optimize time and efficiency (requires optional accessory).
- Human centered design: with 4-star certification for ergonomics and usability.

### Included Accessories

- 1 of 3-sensor probe for blast chiller freezer PNC 880582
- 5 of Aisi 304 stainless steel grid (18" x 26") PNC 922076

### Optional Accessories

- - NOT TRANSLATED - PNC 880294 ☐
- Slide-in rack support for 102 blast chiller freezer PNC 880563 ☐
- 6-sensor probe for blast chiller freezer PNC 880566 ☐
- Kit of 3 single sensor probes for blast chiller/freezers PNC 880567 ☐
- 3-sensor probe for blast chiller freezer PNC 880582 ☐
- 5 stainless steel runners for 102 blast chiller freezer PNC 880588 ☐
- Flanged feet for blast chiller freezer PNC 880589 ☐
- 6 wheels for 102 blast chiller freezer PNC 881285 ☐
- USB single point probe PNC 881292 ☐
- Pair of half size oven racks, type 304 stainless steel PNC 922017 ☐
- Chicken racks, pair (2) (fits 8 chickens per rack) PNC 922036 ☐
- Single 304 stainless steel grid (12" x 20") PNC 922062 ☐
- Aisi 304 stainless steel grid (18" x 26") PNC 922076 ☐
- Pair of 304 stainless steel full-size grids (18" x 26") PNC 922175 ☐
- Baguette tray, made of perforated aluminum, silicon coated, 16" x 24" PNC 922189 ☐
- Perforated baking tray, made of perforated aluminum, 16" x 24" PNC 922190 ☐
- Baking tray, made of aluminum 16" x 24" PNC 922191 ☐
- Pair of frying baskets PNC 922239 ☐
- Pastry grid 16" x 24" PNC 922264 ☐
- Grid for whole chicken 1/1GN (8 per grid - 2.6 lbs each) PNC 922266 ☐
- Kit universal skewer rack & (4) long skewer ovens (TANDOOR) PNC 922324 ☐
- Kit universal skewer rack & (6) long skewer ovens (TANDOOR) PNC 922325 ☐
- Universal skewer pan for ovens (TANDOOR) PNC 922326 ☐
- Skewers for ovens, (6) 14" short (TANDOOR) PNC 922328 ☐
- Multipurpose hook PNC 922348 ☐
- Grid for 8 whole ducks (1.8KG, 4LBS) - GN 1/1 PNC 922362 ☐
- Ethernet board (NIU-LAN) for Blast Chillers PNC 922392 ☐
- Connectivity hub (SIM) Router Ethernet + WiFi + 4G (US and Canada) PNC 922410 ☐
- Connectivity hub (LAN) Router Ethernet + WiFi PNC 922412 ☐
- 10 Tray Rack with wheels, Full Sheet Pans, 2 ½" (65mm) pitch for 102 ovens and blast chillers PNC 922603 ☐
- 8 Tray Rack with wheels, Full Size Sheet Pans, 3" (80mm) pitch for 102 ovens and blast chillers PNC 922604 ☐




**Electrolux**  
PROFESSIONAL


## SkyLine Chills Blast Chiller-Freezer 102 (220 lbs)

- Bakery/pastry tray rack with wheels 400x600mm for 10 GN 2/1 oven and blast chiller freezer, 80mm pitch (8 runners) PNC 922609 ☐
- Trolley for slide-in rack for 62 & 102 ovens and 102 blast chiller. PNC 922627 ☐
- Banquet rack with wheels holding 51 plates for 102 oven and blast chiller freezer, 75mm pitch ( 3" 1/3") PNC 922650 ☐
- Dehydration tray, (12" x 20"), H=2/3" PNC 922651 ☐
- Flat dehydration tray, (12" x 20") PNC 922652 ☐
- Probe holder for liquids PNC 922714 ☐
- Non-stick universal pan (12" x 20" x 3/4") PNC 925000 ☐
- Non-stick universal pan (12" x 20" x 1 1/2") PNC 925001 ☐
- Non-stick universal pan (12" x 20" x 2 1/2") PNC 925002 ☐
- Frying griddle double sided (ribbed/smooth) 12" x 20" PNC 925003 ☐
- Aluminum combi oven grill (12" x 20") PNC 925004 ☐
- Egg fryer for 8 eggs (12" X 20") PNC 925005 ☐
- Flat baking tray with 2 edges (12" x 20") PNC 925006 ☐
- Baking tray for (4) baguettes (12" x 20") PNC 925007 ☐
- Potato baker GN 1/1 for 28 potatoes (12"X20") PNC 925008 ☐
- 6 NON-STICK U-PAN (12" X 20" X 3/4") PNC 925012 ☐
- 6 NON-STICK U-PAN (12"X20"X1 1/2") PNC 925013 ☐
- 6 NON-STICK U-PAN (12"X20"X2 1/2") PNC 925014 ☐

Front

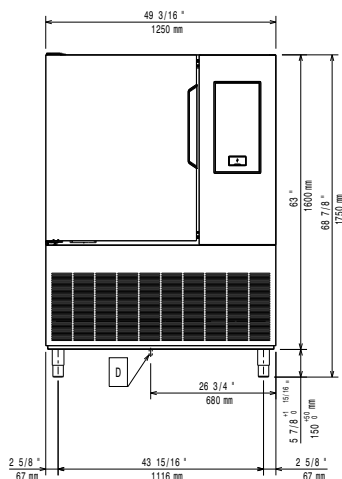


Side

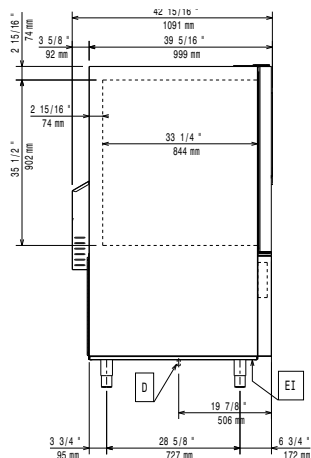

D = Drain  
EI = Electrical connection

Top

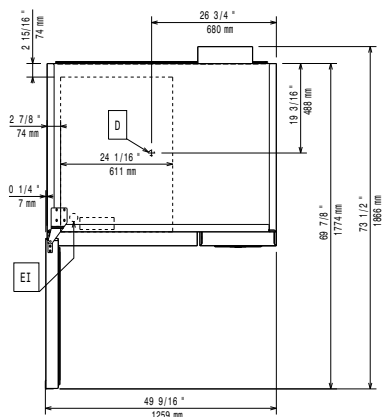

### Electric

#### Supply voltage:

727742 (EBFA12Q) 208 V/3 ph/60 Hz

#### Electrical power, default:

6.4 kW

#### Heating power:

1.8 kW

### Water:

#### Drain line size:

1 1/2" (40 mm)

### Installation:

2 in (5 cm) on sides and back.

#### Clearance:

Please see and follow detailed installation instructions provided with the unit

### Capacity:

#### Max load capacity:

220 lbs (100 kg)

#### Full-size sheet pans:

10 - 18" X 26"

### Key Information:

#### External dimensions, Width:

49 3/16" (1250 mm)

#### External dimensions, Depth:

42 15/16" (1091 mm)

#### External dimensions, Height:

68 7/8" (1750 mm)

#### Internal Dimensions (height):

35 1/2"

#### Internal Dimensions (width):

24 1/16"

#### Shipping width:

44 1/2" (1130 mm)

#### Shipping depth:

53 1/8" (1350 mm)

#### Shipping height:

77 15/16" (1980 mm)

#### Shipping weight:

778 lbs (353 kg)

#### Shipping volume:

106.66 ft<sup>3</sup> (3.02 m<sup>3</sup>)

### Refrigeration Data

Built-in Compressor and Refrigeration Unit

#### Refrigeration power at

evaporation temperature:

14 °F

#### Refrigerant weight:

6.614 lbs (3000 g)

#### Refrigeration power:

38170 BTU/hr

#### Condensation temperature:

104°F

#### Ambient temperature:

89,6°F

### Sustainability

#### Current consumption:

20 Amps

#### Refrigerant type:

R448A

#### GWP Index:

1273