



Electrolux




Electrolux

Vacuum Packers Table Top Vacuum Packer - 8 m³/h

Vacuum Packers Table Top Vacuum Packer - 8 m³/h

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

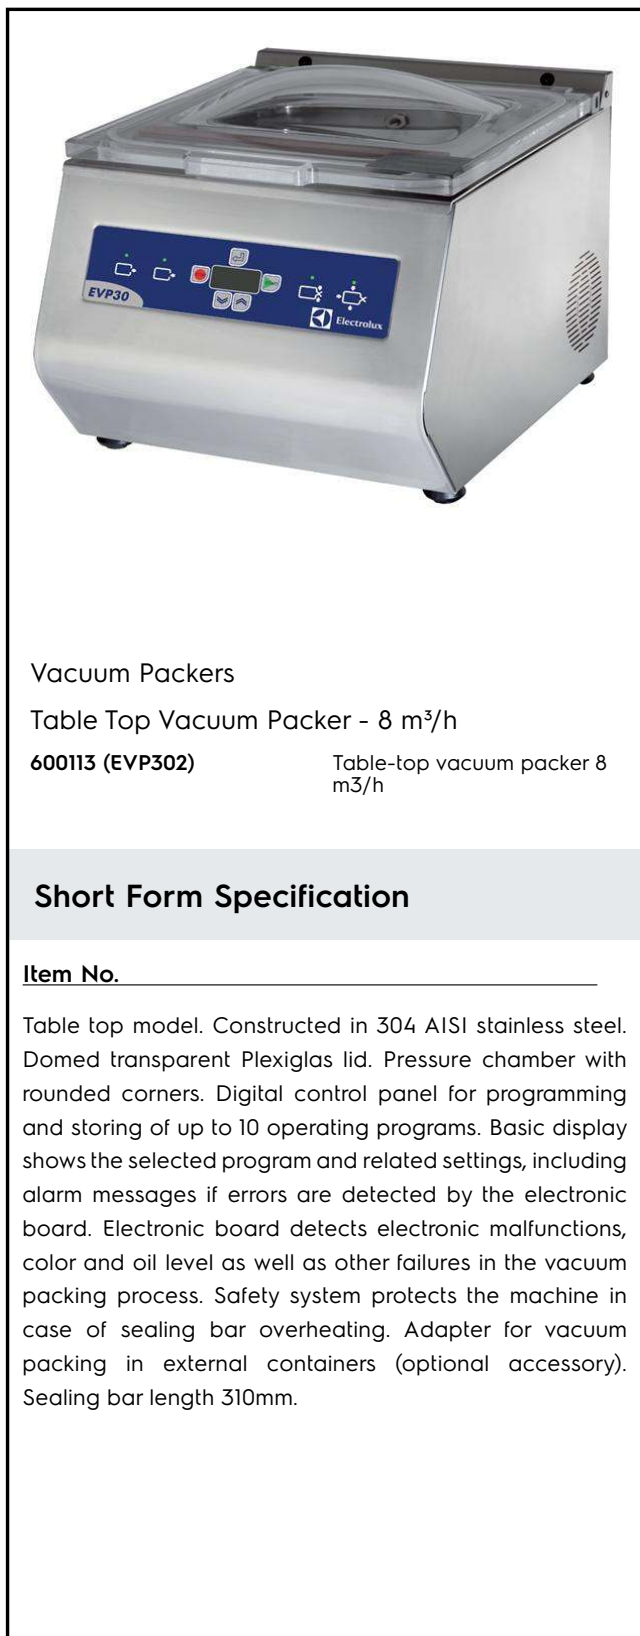

Vacuum Packers

Table Top Vacuum Packer - 8 m³/h

600113 (EVP302)

Table-top vacuum packer 8 m³/h

Short Form Specification

Item No.

Table top model. Constructed in 304 AISI stainless steel. Domed transparent Plexiglas lid. Pressure chamber with rounded corners. Digital control panel for programming and storing of up to 10 operating programs. Basic display shows the selected program and related settings, including alarm messages if errors are detected by the electronic board. Electronic board detects electronic malfunctions, color and oil level as well as other failures in the vacuum packing process. Safety system protects the machine in case of sealing bar overheating. Adapter for vacuum packing in external containers (optional accessory). Sealing bar length 310mm.

Main Features

- To perfectly meet the requirements of the operator, the digital control panel allows the selection of up to 10 operating programs to guarantee optimized vacuum pressure and heat seal time for any product and each program:
 - P1 to P4 are composed of 4 adjustable selections (vacuum, extravacuum, gas and sealing)
 - P5 is the "external outside vacuum" to be used for removing air by to parameters, vacuum and extravacuum
 - t1, t2, t3 are the advanced functions: infusion cycle fro marinating/infusion of foodstuff, compression to soften meat, liquid time to set the sealing stage of puches containing liquid products
 - Sr1, Sr2 are the special programs, condition to clean the pump and test cycle
- To ensure simplicity of use and maximum reliability electronic board detects electronic malfunctions, color and level of oil as well as failures in the vacuum packaging process.
- Model complies with international hygiene and cleanliness standards.
- Can be equipped with an adapter (available as optional accessory), allowing the vacuum process to take place in external containers or appliances by connecting the external container's pipe to the air sucking valve.
- Safety system protects the machine in case of sealing bars overheat.
- Sealing bar 310 mm.
- Microprocessor automatically controls the exact percentage of negative pressure needed for all the air to be removed.
- Warning light to indicate malfunctioning in the vacuum packing process.

Construction

- Liquid or oil residues can be removed from the pump tank using the CP-conditioning program (recommended after long periods of machine inactivity).
- Entirely constructed in 304 AISI stainless steel.
- Unit to have a domed transparent Plexiglass lid.
- Pressure chamber with rounded corners.

Optional Accessories

- Kit adapter for external vacuum PNC packing. Only for 6, 8, 10 and 20 m³/h vacuum packers 650008 ☐
- Inclined filling table to vacuum PNC pack liquids for 6, 8 and 10 m³/h vacuum packers 650009 ☐

APPROVAL: _____

Electric**Supply voltage:**

600113 (EVP302)

220 V/1N ph/50/60 Hz

Total Watts:

0.7 kW

Key Information:**Pump:**8 m³/h**External dimensions, Height:**

345 mm

External dimensions, Width:

390 mm

External dimensions, Depth:

502 mm

Net weight (kg):

33