



Electrolux

Modular Cooking Range Line 900XP Gas Rectangular Boiling Pan 250lt

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



Modular Cooking Range Line

900XP Gas Rectangular Boiling Pan 250lt

391105 (E9BSGLIUFE)

900XP Gas Rectangular
Boiling Pan 250lt - 230 V

Short Form Specification

Item No.

Suitable for natural gas or LPG. To be installed on cantilever systems but also incorporates fixing points for bridging. Robust burners in stainless steel with flame failure device and protected pilot light. Exterior panels of unit in stainless steel with Scotch Brite finish. Pressed well with rounded edges manufactured from AISI 316 stainless steel. Right-angled side edges to allow flush-fitting junction between units. Includes safety valve to control working pressure. Temperature limiter for power regulation allowing precise temperature cooking.

Main Features

- Kettle is suitable to cook, sauté or poach all kinds of produce.
- Produce is uniformly heated in the base and side walls of the kettle by an indirect heating system that uses integrally generated saturated steam at a temperature of 110° C in the jacket.
- Pressed cooking vessel and lid in 316 AISI Stainless steel.
- External valve allows to manually evacuate excess air accumulated in the jacket during heating phase.
- Appliance is IPX5 water resistance certified.
- Safety thermostat protects against low water level.
- No overshooting of cooking temperatures, fast reaction.
- Large capacity food tap enables safe and effortless discharging of contents.
- Firmly fitting cover to reduce cooking time and save energy costs.
- Ergonomic: the depth of the vessel facilitates stirring the food, also the most delicate food.
- Discharge tube and tap are very easy to clean from outside.
- Closed heating system – no waste of energy.
- Solenoid valve to refill with hot and cold water.
- Smooth large surfaces, easy access for cleaning.
- Pressure switch control monitors energy and water consumption.
- The special design of the control knob system guarantees against water infiltration.

Construction

- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of Water additive against corrosion for indirect boiling pans PNC 927222

Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Draught diverter, 150 mm diameter PNC 206132 ☐
- Matching ring for flue condenser, 150 mm diameter PNC 206133 ☐
- Flanged feet kit PNC 206136 ☐
- Pair of side kicking strips (not for refr-freezer base) PNC 206180 ☐

APPROVAL: _____


- Kit 4 feet for concrete installation (not for 900 line free standing grill) ☐ PNC 206210
- Flue condenser for 1 module, 150 mm diameter ☐ PNC 206246
- Water column with swivel arm (water column extension not included) ☐ PNC 206289
- Rear paneling - 1200mm (700/900) ☐ PNC 206376
- 2 side covering panels for free standing appliances ☐ PNC 216134
- Water additive against corrosion for indirect boiling pans ☐ PNC 927222
- Pressure regulator for gas units ☐ PNC 927225




Electrolux

Modular Cooking Range Line 900XP Gas Rectangular Boiling Pan 250lt

Front

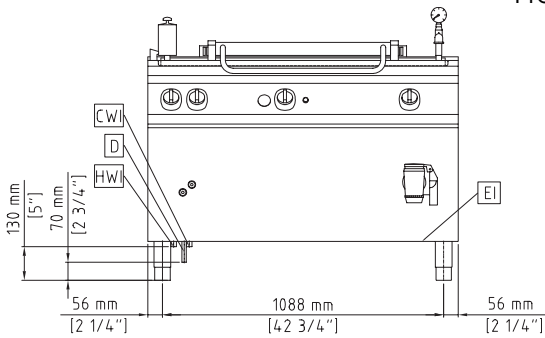


Top

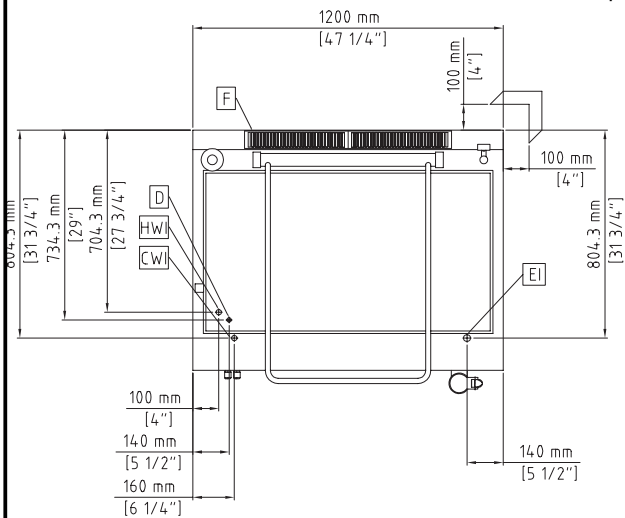

CWI = Cold Water inlet 1
D = Drain
EI = Electrical connection
G = Gas connection

HWI = Hot water inlet

Side

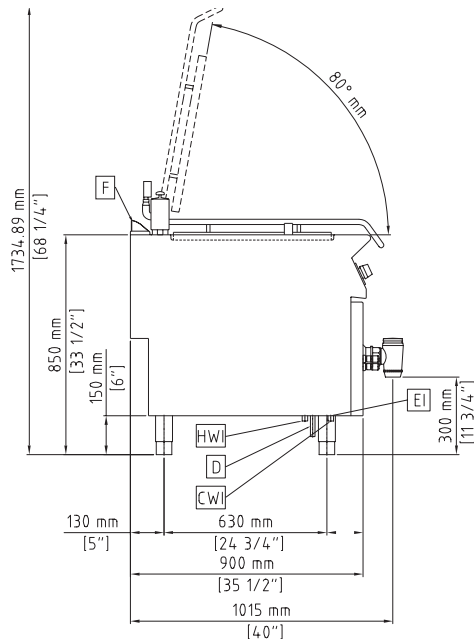

Electric

Supply voltage:

391105 (E9BSGLIUFE)

230 V/1N ph/50/60 Hz

Total Watts:

0.05 kW

Gas

Gas Power:

119315 Btu/hr (35 kW)

Standard gas delivery:

Natural Gas

Gas Type Option:

LPG; Natural Gas

Gas Inlet:

3/4"

Key Information:

Pan useful capacity:

240 lt

Vessel (rectangle) width:

1040 mm

Vessel (rectangle) height:

485 mm

Vessel (rectangle) depth:

550 mm

Net weight:

222 kg

Shipping weight:

256 kg

Shipping height:

1240 mm

Shipping width:

1000 mm

Shipping depth:

1260 mm

Shipping volume:

1.56 m³

No clearance needed on rear sides of unit if wall is of non combustible type. If wall is combustible, minimum 50 mm wall clearance should be maintained.

Modular Cooking Range Line
900XP Gas Rectangular Boiling Pan 250lt

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2016.09.26

