



MODULINE

foodfinish & foodserve technologies

HSW011E • HSW012E • HSW013E

Static holding cabinet with drawers

HOLDING SYSTEMS



CONSTRUCTION FEATURE

- Tightness chamber with radiused corners
- Drawer's guides AISI 304 18/10 stainless steel
- Total thermic insulation with rock or glass wool
- Long lasting drawers seals made up of food grade of high heats resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Handles to carry by hand

STANDARD SUPPLY

- Removable GN1/1 tray racks


FUNCTIONAL FEATURES

- Electronic control of the temperature
- Operating temperature 86° ÷ 248°F
- Two humidity vents : on the drawer and rear wall
- Designed for stacking
- Chamber with safety thermostat

OPTIONS & ACCESSORIES

- No


Model	Overall dimensions (WxDxH)	Tray capacity (00) space between	Power - kW	Power supply
HSW011E	26"x23"x11.6"h	1 x GN 1/1 (150h)	0,7	AC 120V / 60 Hz
HSW012E	26"x23"x19.9"h	2 x GN 1/1 (150h)	1	AC 120V / 60 Hz
HSW013E	26"x23"x28.2"h	3 x GN 1/1 (150h)	1	AC 120V / 60 Hz



Electronic control

with programmer

- A** ON/OFF switch
- B** Display
- C** Temperature decrease key
- D** Temperature increase key
- E** START/STOP key

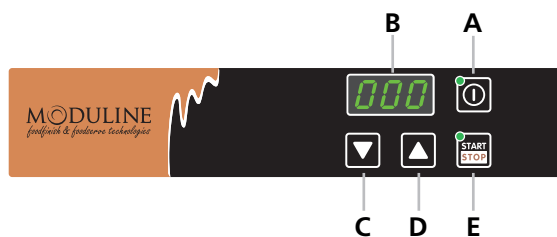

Model	Rated voltage [Vac]	Total input [kW]	Amps. [A]	Connecting wire min. section (type H07 RN-F) [AWG]
HSW011E	AC 120V	0,7	5,9	3 x16
HSW012E	AC 120V	1	8,4	3 x16
HSW013E	AC 120V	1	8,4	3 x16


Model	Working temperature [°F]	Containers capacity: distance	Containers max. height	Product max. capacity [kg / lb]	Net weight [kg / lb]
HSW011E	86 ÷ 248	1 x GN 1/1	5.9" (h)	6 / 13	31 / 68
HSW012E	86 ÷ 248	2 x GN 1/1	5.9" (h)	12 / 26.5	48 / 106
HSW013E	86 ÷ 248	3 x GN 1/1	5.9" (h)	18 / 39.5	67 / 148

TECHNICAL INSTALLATION DIAGRAM


Electricity supply
cable inlet




Adjustable vent for
release of excess
humidity

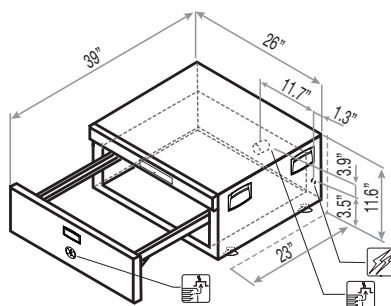

Model HSW 011E

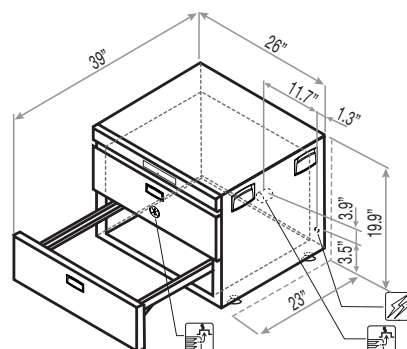

Model HSW 012E

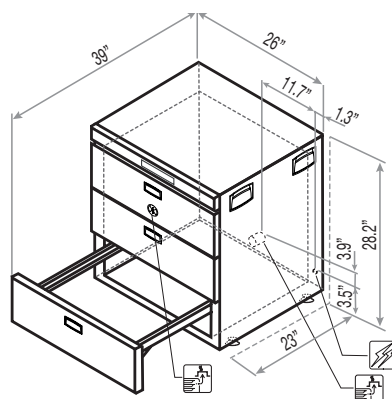

Model HSW 013E

