

### **EMPower** 4 Open Gas Burner Top 24"

| ITEM #  |  |  |
|---------|--|--|
| MODEL # |  |  |
| NAME #  |  |  |
| SIS #   |  |  |



**EMPower** 

4 Open Gas Burner Top 24"

169102 (ACG24)

EMPower 4-BurnerTop, Gas, 24" (4) 32,500

# Short Form Specification

#### Item No.

EMPower unit to be Electrolux Four (4) Open Gas Burner Top, Individually controlled high efficiency 32,500 BTU (9.5 kW) Flower Flame burners. Control knobs provide smooth, continuous rotation from min to max. Suitable for natural gas or propane gas. Cast iron pan supports 12" x 12" (305 mm x 305 mm). Full width crumb tray below the burners. All major components can be accessed from the top and front of the appliance for ease of maintenance. Worktop in AISI 304 Stainless Steel, Front and side panels in Stainless Steel with Scotch Brite finish. Special heavy duty chrome plated knobs for durability and easy cleaning. The configuration of bezels and knobs provides high level of protection against water infiltrations. Right-angled side edges to allow flush fitting between EMPower units. Supplied with 4" (102 mm) height adjustable, removable legs. EMPower unit may be installed on refrigerated base or open cupboard.





#### APPROVAL:

#### **Main Features**

AIA#

- Four individually controlled high efficiency 32,500 BTU (9.5 kW) Flower Flame gas burners.
- Control knobs provide smooth, continuous rotation.
- No gaskets and removable one-piece venturis and burners for easy cleaning.
- The geometrics of the venturis and cast iron burners provides the maximum level of heating efficiency.
- The cast iron burners are anti-clogging.
- The 12"x12" (305mm x 305mm) cast iron pan supports allow for small pots and pans to be placed over the flame thanks to the spcial configuration.
- The cast iron pan supports allow to slide pots and pans from section to section as well as to protect the pilot from spilled food and debris.
- Full width crumb tray below the burners captures all overflow and debris and can be easily extracted for dumping and cleaning.
- All major components can be accessed from the top and front of the appliance for ease of maintenance.
- Front and side panels in Stainless Steel with Scotch Brite
- Special heavy duty chrome plated knobs for durability and easy cleaning.
- The configuration of bezels and knobs provides high level of protection against water infiltrations.
- Right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Provided with kit for side-by-side connection between units for minimizing gaps and possible dirt traps.
- Supplied with 4" (102mm) height adjustable, removable
- Unit may be installed on refrigerated base by removing the legs and inserting the special pins (optional accessory).
- Unit may be installed on open cupboard by removing the legs and inserting the screws provided as standard with the open cupboards.
- Included Accessories: propane converter kit, pressure regulator and main shut off valve.
- In compliance with ETL Certification (UL & NSF).
- Configured for Natural Gas, LP Conversion Kit Included.

#### Construction

- Worktop in 304 AISI stainless steel.
- 4 screws to install on the cupboard base are supplied with the unit.
- Gas pressure regulator is supplied with the unit.

#### Optional Accessories

• EMPower - 4 pins to fix top to refrigerated/open base

PNC 169048

• EMPower Restaurant Range Shelf Support 24". Can be mounted on

EMPower Open Gas Burner Tops and Gas Burner Ranges.

PNC 169078 🗅




# EMPower 4 Open Gas Burner Top 24"

 EMPower back mounted rear shelf-spacer, PNC 169098 ☐ 24" unit

EMPower portioning shelf 12"
PNC 169173 □
EMPower portioning shelf 16"
PNC 169174 □
EMPower portioning shelf 24"
PNC 169175 □



## **EMPower** 4 Open Gas Burner Top 24"

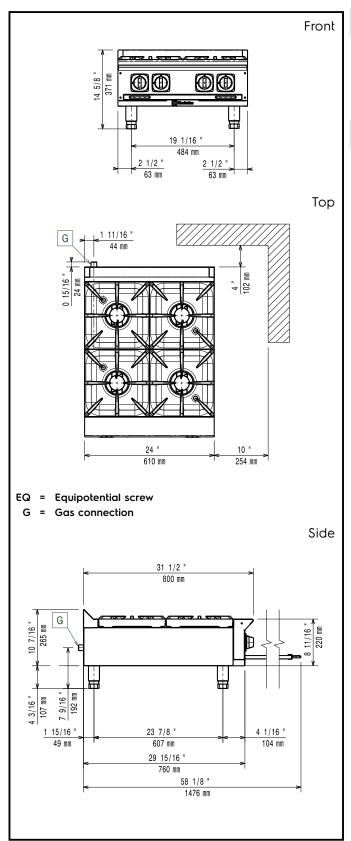

#### Gas

Gas Power:

169102 (ACG24) 130000 Btu/hr (38 kW)

Standard gas delivery: Natural Gas Gas Type Option: Propane Gas Inlet: 3/4"

#### **Key Information:**

9.5 - 9.5 kW (32385.5 -Front Burners Power:

32385.5 Btu/hr)

9.5 - 9.5 kW (32385.5 -Front Plates Power: 32385.5 Btu/hr)

9.5 - 9.5 kW (32385.5 -

**Back Plates Power:** 32385.5 Btu/hr) Net weight: 126 lbs (57 kg) Shipping width: 35 7/16" (900 mm) Shipping depth: 26 " (660 mm)

25 1/2" (648 mm) Shipping height: Shipping weight: 143 lbs (65 kg) Shipping volume: 13.59 ft3 (0.38 m3)

\*The rear and side clearances shown on the diagram indicate the minimum distances reccomeneded from the

appliance to combustible surfaces.