



Hot Food Table/Drop-In Hot Food Well models 9560 & 9560N

model 9560-1 9560-2 9560-3 9560-4 9560-5 9560-6
 9560-2N 9560-3N

Description:

Stainless steel drop-in, electrically heated hot food well unit with individually and thermostatically controlled wells. Separate control panel for field installation, prewired.

Specifications:

UNIT TOP: Top to be one piece 18 gauge stainless steel. Top openings to be die-stamped with raised perimeter rims.

FOOD WELLS: Units fitted with compliment of 12" x 20" x 6 1/2" deep, electrically heated, sealed food wells, individually and thermostatically controlled. Unit prewired to controls, mounted on separate stainless steel panel. Note: If optional drains & manifold are ordered, common gate is provided installed.

UNIT BODY: Fully insulated exterior body of corrosion resistant steel.

CONTROLS: Controls prewired to junction box mounted on separate stainless steel panel for field installation in counter front. Connections to heating elements to be located outside of heated zone to avoid wiring deterioration. 208 or 240V operation. (120V available on request).

Standard Features:

- Individually controlled wells for maximum operator control
- True thermostatic control for precise food temperatures
- Drains available as option for wet operation
- Approved for installation in either stainless or laminate counter work
- Units listed under N.S.F. standard 4 (excludes "N" models)
- UL approved (excludes "N" models)

Options & Accessories:

- Adaptor bars
- Extended thermostatic lead

model 9560-4 shown



model 9560-2N shown




LEGEND FOR MODEL # 9560-1

(1) ELEMENT, 1100 WATTS

CHOOSE ONE:

- 120V/60Hz/1Ph/9.2Amps
- 208V/60Hz/1Ph/5.3Amps
- 240V/60Hz/1Ph/4.6Amps

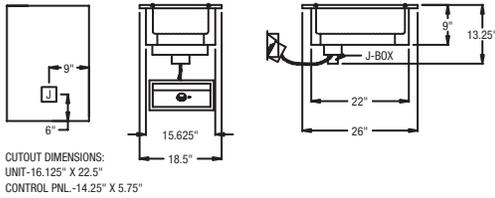


LEGEND FOR MODEL # 9560-2

(2) ELEMENTS, 2200 WATTS

CHOOSE ONE:

- 120V/60Hz/1Ph/18.4Amps
- 208V/60Hz/1Ph/10.6Amps
- 240V/60Hz/1Ph/9.2Amps

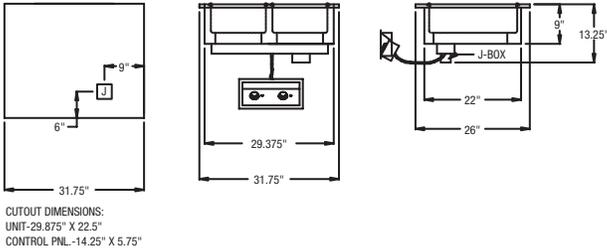


LEGEND FOR MODEL # 9560-3

(3) ELEMENTS, 3300 WATTS

CHOOSE ONE:

- 120V/60Hz/1Ph/27.6Amps
- 208V/60Hz/1Ph/15.9Amps
- 240V/60Hz/1Ph/13.8Amps

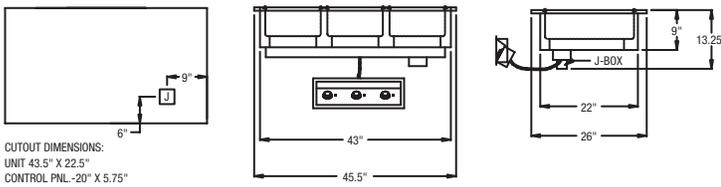


LEGEND FOR MODEL # 9560-4

(4) ELEMENTS, 4400 WATTS

CHOOSE ONE:

- 120V/60Hz/1Ph/36.8Amps
- 208V/60Hz/1Ph/21.2Amps
- 240V/60Hz/1Ph/18.4Amps

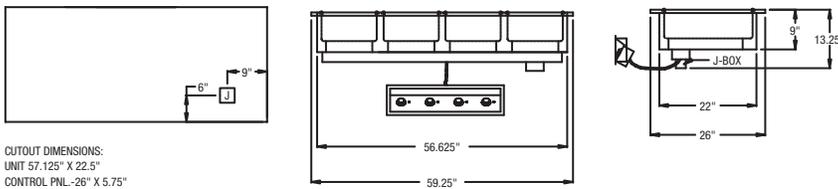


LEGEND FOR MODEL # 9560-5

(5) ELEMENT, 5500 WATTS

CHOOSE ONE:

- 120V/60Hz/1Ph/46.0Amps
- 208V/60Hz/1Ph/26.5Amps
- 240V/60Hz/1Ph/23.0Amps

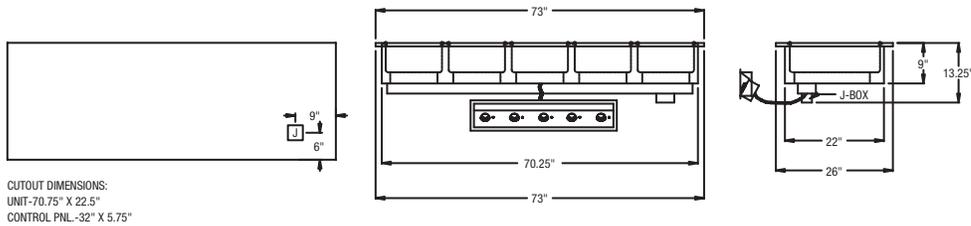


LEGEND FOR MODEL # 9560-6

(6) ELEMENT, 6600 WATTS

CHOOSE ONE:

- 120V/60Hz/1Ph/55.2Amps
- 208V/60Hz/1Ph/31.7Amps
- 240V/60Hz/1Ph/27.6Amps

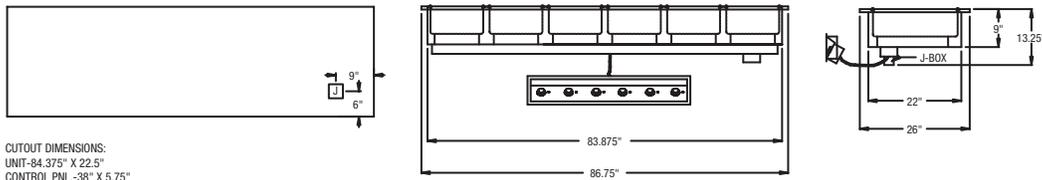

| Model | L | D | 12" x 20" Pan Cap. | Cut Out Size | | No. of Elements | Watts | Amps / 60 / 1 PH | | | Ship Wt. |
|---------|-----------|-------|--------------------|-------------------|------------------|-----------------|-------|------------------|------|------|----------|
| | | | | Unit | Control Panel | | | 120V | 208V | 240V | |
| 9560-1 | 18 1/2" | 26" | 1 | 16 1/8" x 22 1/2" | 14 1/4" x 5 3/4" | 1 | 1100 | 9.2 | 5.3 | 4.6 | 60 |
| 9560-2 | 31 7/8" | 26" | 2 | 29 7/8" x 22 1/2" | 14 1/4" x 5 3/4" | 2 | 2200 | 18.4 | 10.6 | 9.2 | 85 |
| 9560-3 | 45 9/16" | 26" | 3 | 43 1/2" x 22 1/2" | 20" x 5 3/4" | 3 | 3300 | 27.6 | 15.9 | 13.8 | 103 |
| 9560-4 | 59 5/16" | 26" | 4 | 57 1/8" x 22 1/2" | 26" x 5 3/4" | 4 | 4400 | 36.8 | 21.2 | 18.4 | 170 |
| 9560-5 | 73 1/16" | 26" | 5 | 70 3/4" x 22 1/2" | 32" x 5 3/4" | 5 | 5500 | 46 | 27.5 | 23 | 230 |
| 9560-6 | 86 11/16" | 26" | 6 | 84 3/8" x 22 1/2" | 38" x 5 3/4" | 6 | 6600 | 55.2 | 31.7 | 27.6 | 290 |
| 9560-2N | 47.625" | 18.5" | 2 | 45.264" x 16.125" | 14.25" x 5.75" | 2 | 2200 | 18.4 | 10.6 | 9.2 | 108 |
| 9560-3N | 69.142" | 18.5" | 3 | 66.327" x 16.125" | 20" x 5.75" | 3 | 3300 | 27.6 | 15.9 | 13.8 | 175 |

Power supply requires hard wiring to "J" box.

All regulatory approval excludes "N" models



Component