



Electrolux

Crosswise Convection Gas Convection Oven, 20 GN2/1

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



Electrolux



Crosswise Convection

Gas Convection Oven, 20 GN2/1

260704 (FCG202)

Gas convection oven
20x2/1GN, crosswise

Short Form Specification

Item No. _____

Main structure in stainless steel, with seamless joints in the oven cavity. Double-glazed door with tempered glass. Cavity lighting. Unique air-flow channel system. Atmospheric burner.

Cooking cycles: air convection, convection with 5 stage humidification. Max. temperature of 300°C.

Functional level: base, manual.

"Cross-wise" pan rack suitable for 20x2/1GN or 40x1/1GN.

Supplied with n. 1 roll-in rack, 60mm pitch, and n. 2 roll-in rack slides.

Main Features

- IPX4 water resistance certification.
- Racks can be easily removed without the need for special tools.
- Unique air-flow system guarantees perfect distribution of heat throughout the oven cavity.
- Maximum temperature of 300°C.
- Food temperature probe available as accessory.
- Rapid cooling of oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- 5 Stage humidification control, to ensure perfect pastries and succulent roasts.
- Meets the requirements of CE, VDE and DVGW for safety.

Construction

- Height adjustable feet.
- Access to all components from the front.
- Stainless steel oven cavity with rounded corners.
- Double-glazed door with tempered glass.
- External access door for electrical connections.
- All connections made on the left side below the oven.
- Integrated drain outlet.

Included Accessories

- 1 of 60mm pitch roll-in rack for 20x2/1GN PNC 922204


Optional Accessories

- Automatic water softener for ovens PNC 921305 ☐
- Resin sanitizer for water softener PNC 921306 ☐
- Fat filter for gas 10 and 20 1/1 and 2/1 GN ovens (2 filters are necessary for 20-grid ovens) PNC 921700 ☐
- Probe for ovens 20x1/1 and 2/1GN PNC 921704 ☐
- Flue condenser for gas ovens 20x2/1GN PNC 921712 ☐
- Trolley for 20x2/1GN roll-in rack PNC 922134 ☐
- Base for 20x2/1GN roll-in rack PNC 922142 ☐
- Side external spray unit (needs to be mounted outside and includes support for mounting to oven) PNC 922171 ☐
- Pair of baking tray support PNC 922173 ☐
- Pair of 2/1GN aisi 304 stainless steel grids PNC 922175 ☐


APPROVAL: _____

- 60mm pitch roll-in rack for 20x2/1GN ☐ PNC 922204
- 80mm pitch roll-in rack for 20x2/1GN ☐ PNC 922206
- 2 frying baskets for ovens ☐ PNC 922239
- Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens ☐ PNC 922325
- Universal skewer rack ☐ PNC 922326
- 6 short skewers ☐ PNC 922328
- Smoker for lengthwise and crosswise ovens - 4 kinds of smoker wood chips are available on request ☐ PNC 922338

Front

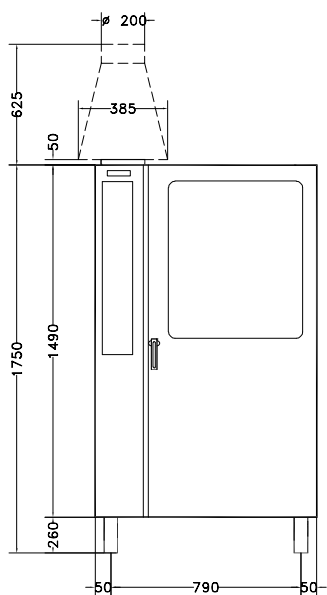


Top

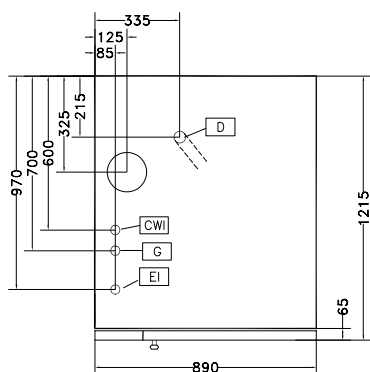

CWI1 = Cold Water inlet 1
CWI2 = Cold Water Inlet 2
D = Drain
EI = Electrical connection
G = Gas connection

Side

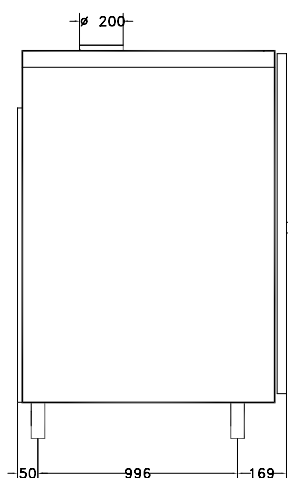

Electric

Supply voltage:
260704 (FCG202) 220-230 V/1N ph/50 Hz
Auxiliary: 1 kW
Electrical power max.: 1 kW

Gas

Gas Power: 170450 Btu/hr (50 kW)

Capacity:

Shelf capacity: 20

Key Information:

External dimensions, Height: 1700 mm
External dimensions, Width: 890 mm
External dimensions, Depth: 1215 mm
Net weight: 311.8 kg
Height adjustment: 80/0 mm
Functional level: Basic
Type of grids: 2/1 Gastronorm
Runners pitch: 60 mm
Cooking cycles - air-convection: 300 °C
Internal dimensions, width: 590 mm
Internal dimensions, depth: 760 mm
Internal dimensions, height: 1350 mm