



# Electrolux


## Vacuum Packers Table Top Vacuum Packer -10 m<sup>3</sup>/h

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



Electrolux

Vacuum Packers  
Table Top Vacuum Packer -10 m<sup>3</sup>/h

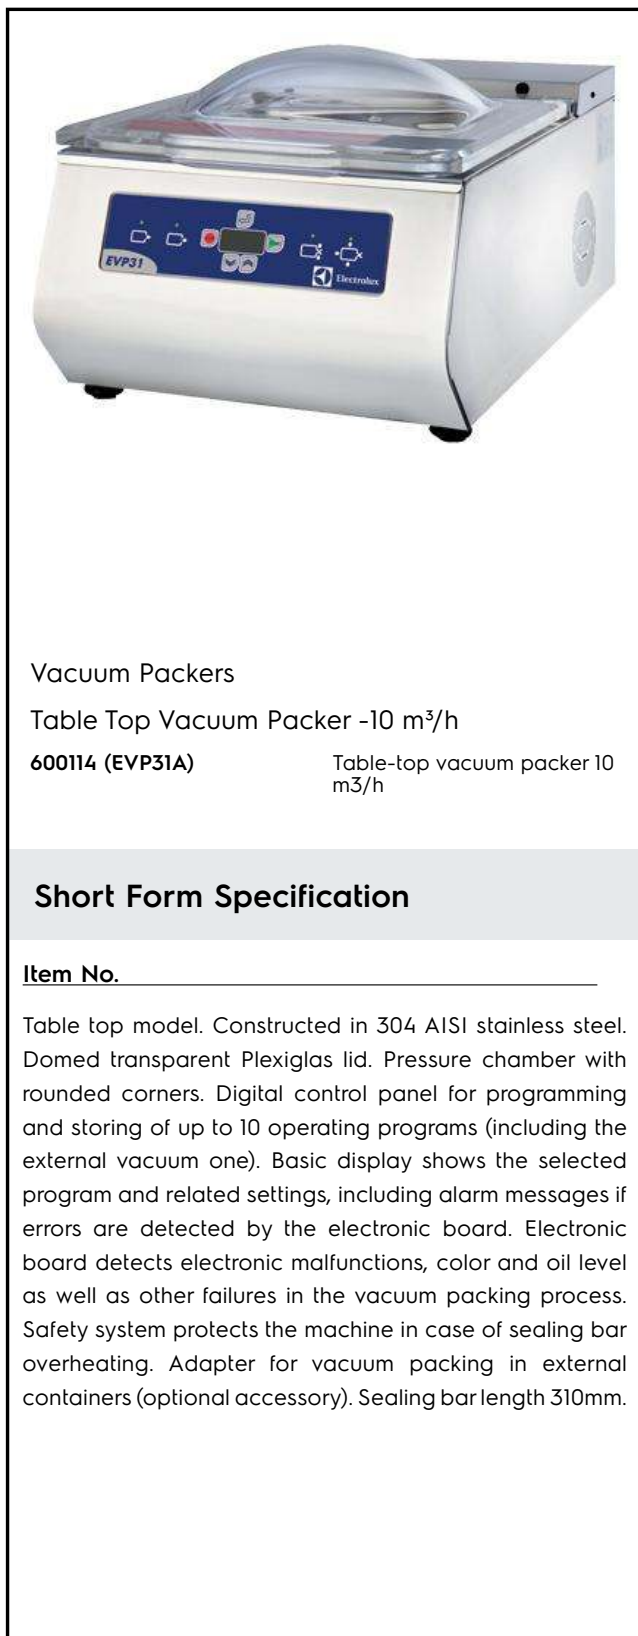

Vacuum Packers

Table Top Vacuum Packer -10 m<sup>3</sup>/h

600114 (EVP31A)

Table-top vacuum packer 10 m<sup>3</sup>/h

### Short Form Specification

#### Item No.

Table top model. Constructed in 304 AISI stainless steel. Domed transparent Plexiglas lid. Pressure chamber with rounded corners. Digital control panel for programming and storing of up to 10 operating programs (including the external vacuum one). Basic display shows the selected program and related settings, including alarm messages if errors are detected by the electronic board. Electronic board detects electronic malfunctions, color and oil level as well as other failures in the vacuum packing process. Safety system protects the machine in case of sealing bar overheating. Adapter for vacuum packing in external containers (optional accessory). Sealing bar length 310mm.

### Main Features

- To perfectly meet the requirements of the operator, the digital control panel allows the selection of up to 10 operating programs to guarantee optimized vacuum pressure and heat seal time for any product and each program:
  - P1 to P4 are composed of 4 adjustable selections (vacuum, extravacuum, gas and sealing)
  - P5 is the "external outside vacuum" to be used for removing air by to parameters, vacuum and extravacuum
  - t1, t2, t3 are the advanced functions: infusion cycle fro marinating/infusion of foodstuff, compression to soften meat, liquid time to set the sealing stage of puches containing liquid products
  - Sr1, Sr2 are the special programs, condition to clean the pump and test cycle
- To ensure simplicity of use and maximum reliability electronic board detects electronic malfunctions, color and level of oil as well as failures in the vacuum packaging process.
- Model complies with international hygiene and cleanability standards.
- Can be equipped with an adapter (available as optional accessory), allowing the vacuum process to take place in external containers or appliances by connecting the external container's pipe to the air sucking valve.
- Safety system protects the machine in case of sealing bars overheat.
- Sealing bar 310 mm.
- Microprocessor automatically controls the exact percentage of negative pressure needed for all the air to be removed.
- Warning light to indicate malfunctioning in the vacuum packing process.

### Construction

- Liquid or oil residues can be removed from the pump tank using the CP-conditioning program (recommended after long periods of machine inactivity).
- Entirely constructed in 304 AISI stainless steel.
- Unit to have a domed transparent Plexiglass lid.
- Pressure chamber with rounded corners.

### Optional Accessories

- Kit adapter for external vacuum packing. Only for 6, 8, 10 and 20 m<sup>3</sup>/h vacuum packers PNC 650008 ☐
- Inclined filling table to vacuum pack liquids for 6, 8 and 10 m<sup>3</sup>/h vacuum packers PNC 650009 ☐


APPROVAL: \_\_\_\_\_




# Electrolux

## Vacuum Packers Table Top Vacuum Packer -10 m<sup>3</sup>/h

Front

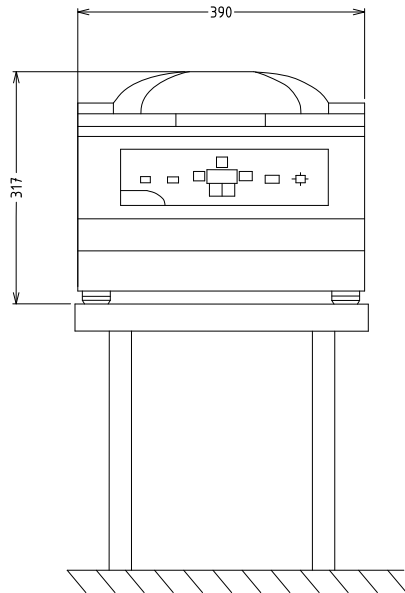

Side

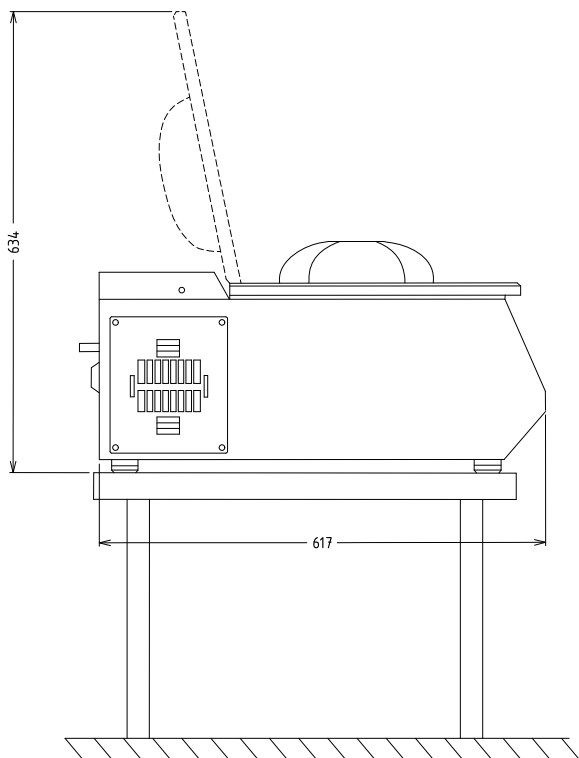

EI = Electrical connection

### Electric

Supply voltage:

600114 (EVP31A)

220 V/1N ph/50/60 Hz

Total Watts:

0.7 kW

### Key Information:

Pump:	10 m <sup>3</sup> /h
External dimensions, Height:	330 mm
External dimensions, Width:	390 mm
External dimensions, Depth:	640 mm
Net weight (kg):	46

Vacuum Packers  
Table Top Vacuum Packer -10 m<sup>3</sup>/h

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2016.09.15

