



No. PI POCKET PULL FLUSH HANDLE ASSEMBLY

DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
22DEC95	JSS	CRS	0.75:1	J-PI-3

REV.	DATE	BY-CHKD	REVISIONS	PART NUMBER	MATERIAL	PART NUMBER	MATERIAL	PANEL THICKNESS	
				PI-30-101-XX	ABS	PI-31	ABS, UL94-V0	1 MIN.-1.8 MAX.	
				PI-30-103-XX	ABS	PI-33	ABS, UL94-V0	1.8 MIN.-3.3 MAX.	
				PI-30-105-XX	ABS	PI-35	ABS, UL94-V0	3.3 MIN.-4.8 MAX.	
				PI-30-107-XX	ABS	PI-37	ABS, UL94-V0	4.8 MIN.-6.3 MAX.	

PART NUMBER LEGEND

- XX EQUALS COLOR OF ABS MATERIAL.
-03 = MEDIUM GRAY
-04 = LIGHT GRAY
-11 = BLACK
-30 = KODAK IMAGE LIGHT GRAY


NOTE: ADD THE ABOVE -XX NUMBER TO
THE ABS, UL94-V0 MATERIAL PART No.
FOR ANY COLORS OTHER THAN BLACK.

MATERIAL AND FINISH

LIFT AND CUP - SEE ABOVE TABLE
MOUNTING SCREWS - STEEL, ZINC PLATED
PLUS BRIGHT CHROMATE DIP.

INSTALLATION INSTRUCTIONS

1. PREPARE A RECTANGULAR HOLE AS SHOWN.
2. INSERT LIFT INTO THE PANEL, SEATING
THE SLOT AGAINST THE TOP OPENING.
3. ATTACH THE CUP TO THE BACK OF THE LIFT AND
PANEL USING THE SUPPLIED MOUNTING SCREWS.

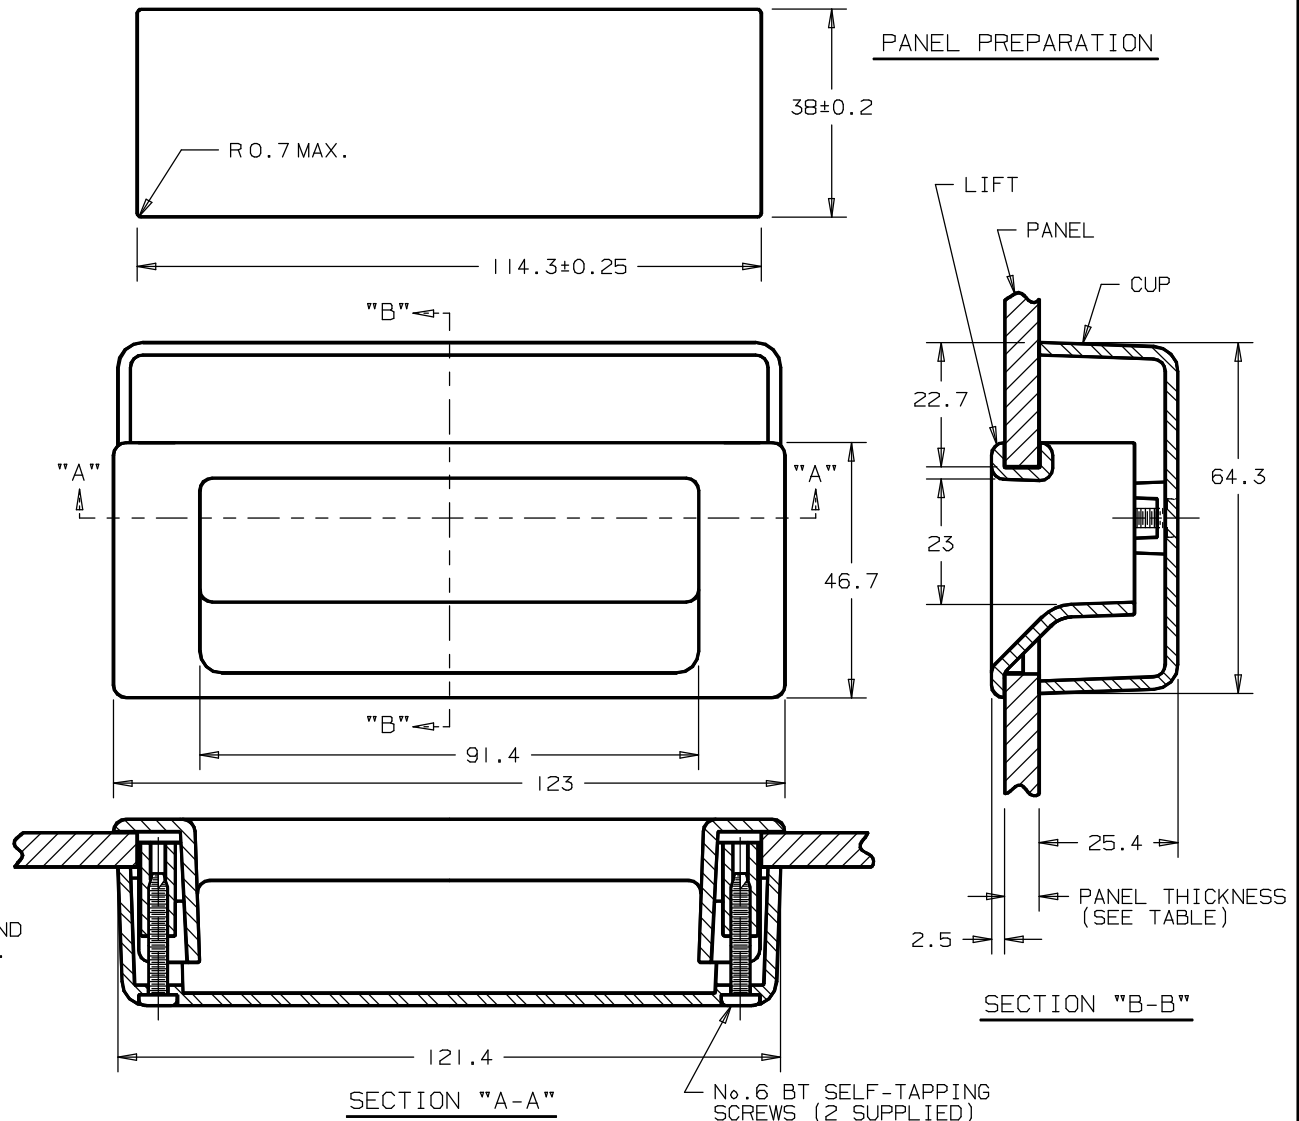

FORMAT A 3/88

PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING
INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT
AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.

ALL DIMENSIONS ARE IN MILLIMETERS.
ALL DIMENSIONS WITHOUT TOLERANCES ARE REFERENCE.
THIRD ANGLE PROJECTION DRAWING.

DRAWING NUMBER

J-PI-3